

LOM IA	APP CRS	Rwy Ldg	9129
329	280°	TDZE	588
		Apt Elev	592

NDB RWY 28
NIAGARA FALLS INTL (IAG)


⚠ Circling Rwy 6 NA at night.
⚠ Rwy 28 helicopter visibility reduction below RVR 4000 NA.
Circling NA for Cat E southeast of Rwy 6-24.
For inop ALS, increase visibility Cats A/B RVR 5500, Cat C/D/E 1¾ SM.

MALSR




MISSED APPROACH: Climb to 1600 on heading 294° then climbing right turn to 3200 direct KATHI LOM and hold, continue climb-in-hold to 3200.

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
---------------------	--------------------------------	---	------------------------	------------------

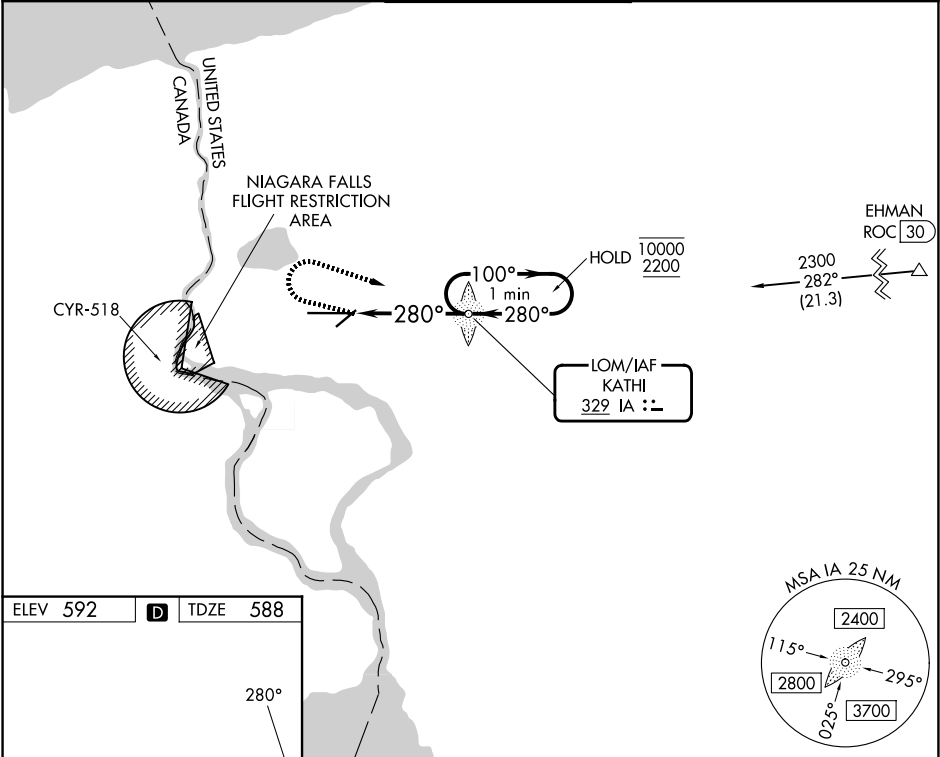

ELEV 592 **D** TDZE 588



1600 3200 IA

hdg 294°

IA LOM KATHI

One Minute Holding Pattern

100° 10000
280° 2200

280° 2000

3.10° TCH 55

4.1 NM

CATEGORY	A	B	C	D	E
S-28	1200/40	612 (700-¾)	1200-1 ¾	612 (700-1 ¾)	
CIRCLING	1200-1	608 (700-1)	1280-2 688 (700-2)	1280-2 ¼ 688 (700-2 ¼)	1280-2 ½ 688 (700-2 ½)

FAF to MAP 4.1 NM

Knots	60	90	120	150	180
Min:Sec	4:06	2:44	2:03	1:38	1:22

REIL Rwys 6 and 24
TDZL/RCLS Rwy 28
RCLS Rwy 10
HIRL Rwy 10-28
MIRL Rwy 6-24