


WAAS CH 90132 W06A	APP CRS 060°	Rwy Ldg TDZE 586 Apt Elev 592
--	------------------------	---

RNAV (GPS) RWY 6

NIAGARA FALLS INTL (IAG)

RNP APCH - GPS.		MISSED APPROACH: Climb to 3600 direct ZUPUV and hold, continue climb-in-hold to 3600.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. ▲ Rwy 6 helicopter visibility reduction below 1 SM NA. Rwy 6 Straight-in and Circling minimums NA at night.		

ATIS 120.8 269.4	BUFFALO APP CON 126.5 317.6	NIAGARA TOWER ★ 118.5 (CTAF) 0 349.0	GND CON 125.3 275.8	UNICOM 122.95
----------------------------	---------------------------------------	--	-------------------------------	-------------------------

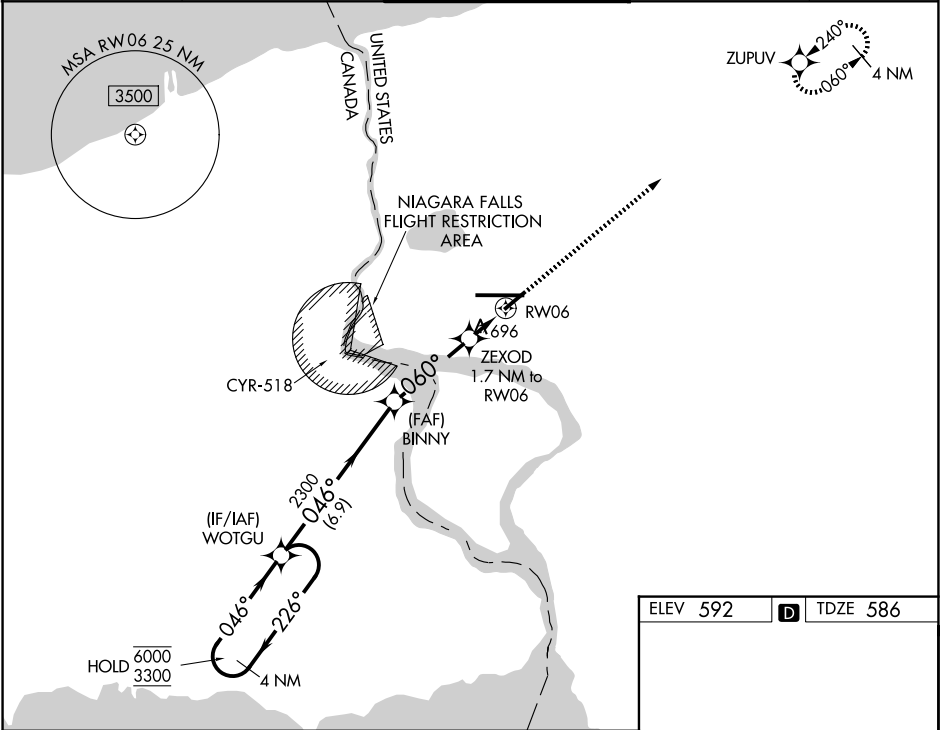

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 45).		3600	ZUPUV
6000 3300		WOTGU	BINNY	ZEXOD	RW06
GP 3.00° TCH 55		2300	1180	1.7 NM to RW06	
226°		046°	060°	060°	
046°		046°	060°	060°	
6.9 NM		3.5 NM	1.7 NM		
CATEGORY	A	B	C	D	
LPV DA		864-1	278 (300-1)		
LNAV/VNAV DA		849-1	263 (300-1)		
LNAV MDA	1000-1	414 (500-1)	1000-1½	414 (500-1½)	
CIRCLING	1100-1	508 (600-1)	1280-2 688 (700-2)	1280-2¼ 688 (700-2¼)	

ELEV 592

TDZE 586

9826 X 150

5188 X 150

TWR

060°

REIL Rwy 6 and 24
TDZL/RCLS Rwy 28
RCLS Rwy 10
HIRL Rwy 10-28
MIRL Rwy 6-24