


LOC I-LOW	APP CRS	Rwy Ldg	8400
110.7	012°	TDZE	6649
		Apt Elev	6649

ILS or LOC RWY 1

YELLOWSTONE (WYS)

ADF required. DME required for MUPDE stepdown fix.		MALSRS	MISSED APPROACH: Climb to 9000, then climbing right turn to 10100 direct TARGY LOM and hold.
NA	Obtain local altimeter setting on CTAF, when not received procedure		
-19°C	NA. Inoperative table does not apply to S-LOC 1 Cat A. For inoperative MALSRS, increase S-ILS 1 all Cats visibility to 2 3/4 mile.		

AWOS-3P	SALT LAKE CENTER	UNICOM
118.1	132.4 338.3	123.0 (CTAF)

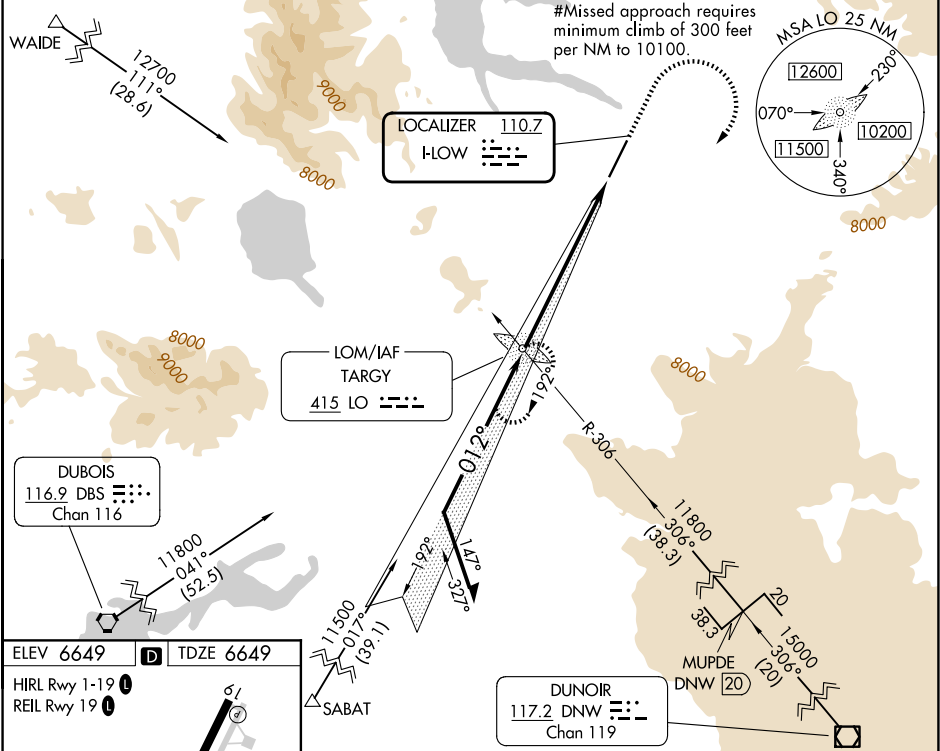

ELEV 6649	D	TDZE 6649
HIRL Rwy 1-19		
REIL Rwy 19		
FAF to MAP 6.9 NM		
Knots	60	90 120 150 180
Min:Sec	6:54	4:36 3:27 2:46 2:18

Remain within 10 NM		LO LOM	9000	10100	TARGY
10100		192°	8941		
GS 3.00° TCH 50		012°	9600	*9000	
VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 50).					
CATEGORY		A	B	C	D
S-ILS 1#			6849-1/2	200 (200-1/2)	
S-ILS 1			7449-2 1/4	800 (800-2 1/4)	
S-LOC 1		7780-1 1/4 1131 (1200-1 1/4)	7780-1 1131 (1200-1)	7780-2 1/2 1131 (1200-2 1/2)	
CIRCLING		7780-1 1/4 1131 (1200-1 1/4)	7780-1 1/2 1131 (1200-1 1/2)	7780-3 1131 (1200-3)	8020-3 1371 (1400-3)