

WAAS CH 45534 W28A	APP CRS 281°	Rwy Ldg TDZE Apt Elev	8005 40 40
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 28

Wallops Flight Facility (WAL)



▼

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 343 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 453 and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Girding Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct MAGGO and hold.

ASOS 119.175	PATUXENT APP CON★ 127.95 314.0	Wallops Tower★ 126.5 (CTAF) 306.975 (CTAF)	GND CON 127.875 269.325
------------------------	--	--	-----------------------------------

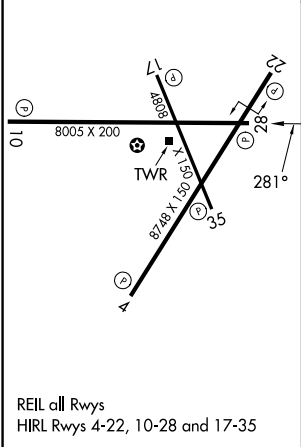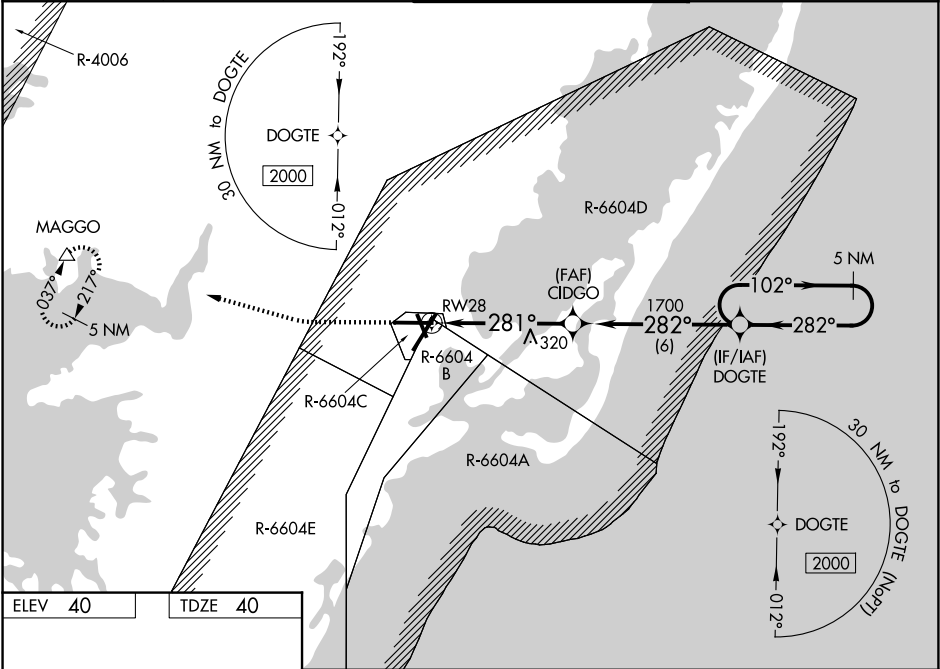

600	2000	MAGGO	△	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 61).	5 NM Holding Pattern
*LNAV only.					
RWY 28					
1.3 NM to RWY 28					
CIDGO					
1700					
281°					
282°					
102°					
2000					
GP 3.00° TCH 50					
1.3 NM 3.8 NM 6 NM					
CATEGORY	A	B	C	D	
LPV DA	290-¾ 250 (300-¾)				
LNAV/VNAV DA	400-1½ 360 (400-1½)				
LNAV MDA	520-1	480 (500-1)	520-1¾	480 (500-1¾)	
CIRCLING	600-1	560 (600-1)	620-1½	860-2¾	580 (600-1½) 820 (900-2¾)