

WAAS CH 72605 W32A	APP CRS 319°	Rwy Ldg 7510 TDZE 27 Apt Elev 30
--	------------------------	---

RNAV (GPS) RWY 32
SARASOTA/BRADENTON INTL (SRQ)

RNP APCH.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When control tower closed, LPV and LNAV/VNAV NA; increase LNAV all Cats visibility to 1 mile. When control tower closed, inop table does not apply to LNAV Cats A and B. When control tower closed, for inop MALSR, increase LNAV Cat C and D visibility to 1½ mile.

MALS®




MISSED APPROACH: Climb to 3000 direct ACIPU and on track 047° to PAIRS and hold, continue climb-in-hold to 3000.

ATIS 124.375	TAMPA APP CON 119.65 353.575	SARASOTA TOWER ★ 120.1(CTAF) 0 256.8	GND CON 121.9 273.6	CLNC DEL 118.25	UNICOM 122.95
-----------------	---------------------------------	---	------------------------	--------------------	------------------

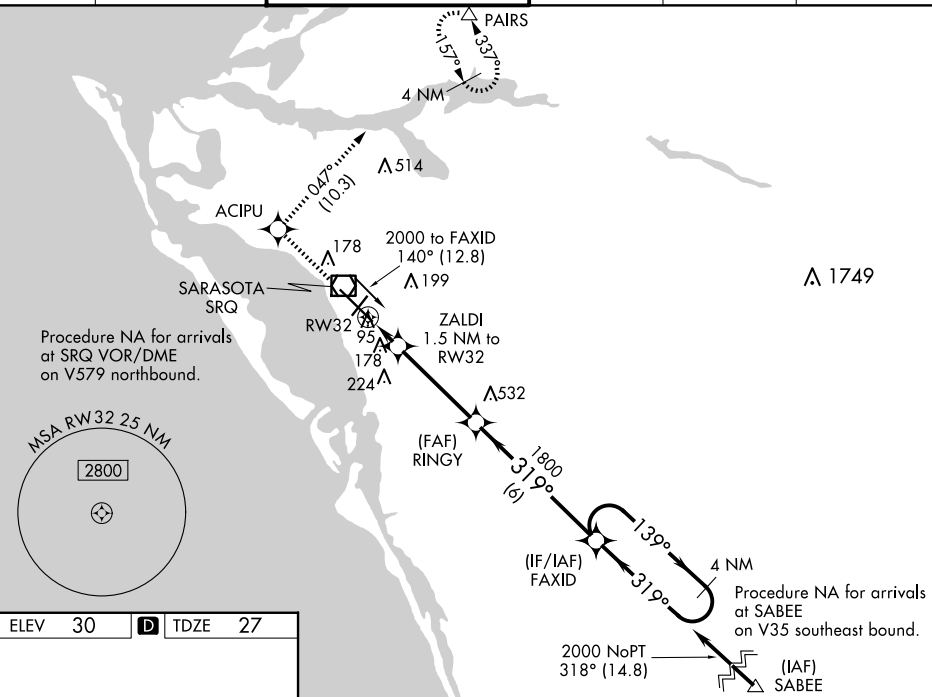

ELEV	30	D	TDZE	27
------	----	----------	------	----



REIL Rwy 22 **L**
HIRL Rwy 14-32 and 4-22 **L**

SARASOTA/BRADENTON, FLORIDA
Amdt 3D 04NOV21

27°24'N-82°33'W

SARASOTA/BRADENTON INTL (SRQ)
RNAV (GPS) RWY 32