

LOC I-OLM	APP CRS	Rwy Ldg	5500
111.9	176°	TDZE	207
		Apt Elev	208



ILS or LOC RWY 17
OLYMPIA RGNL (OLM)

⚠ DME or RADAR required. For inop ALS, increase S-LOC 17 Cat C/D visibility to 1½ SM.

MALSR

MISSED APPROACH: Climb to 1400 then climb to 5500 on OLM VORTAC R-176 to CETRA INT/OLM 15 DME and hold, continue climb-in-hold to 5500.

ATIS 135.725	SEATTLE APP CON 121.1 290.9	OLYMPIA TOWER★ 124.4(CTAF) 254.25	GND CON 121.6	UNICOM 122.95
-----------------	--------------------------------	--------------------------------------	------------------	------------------

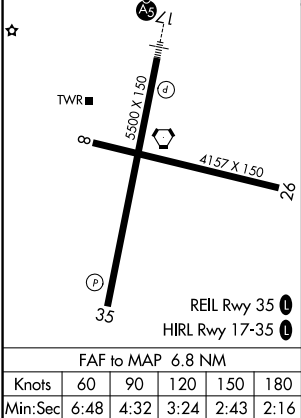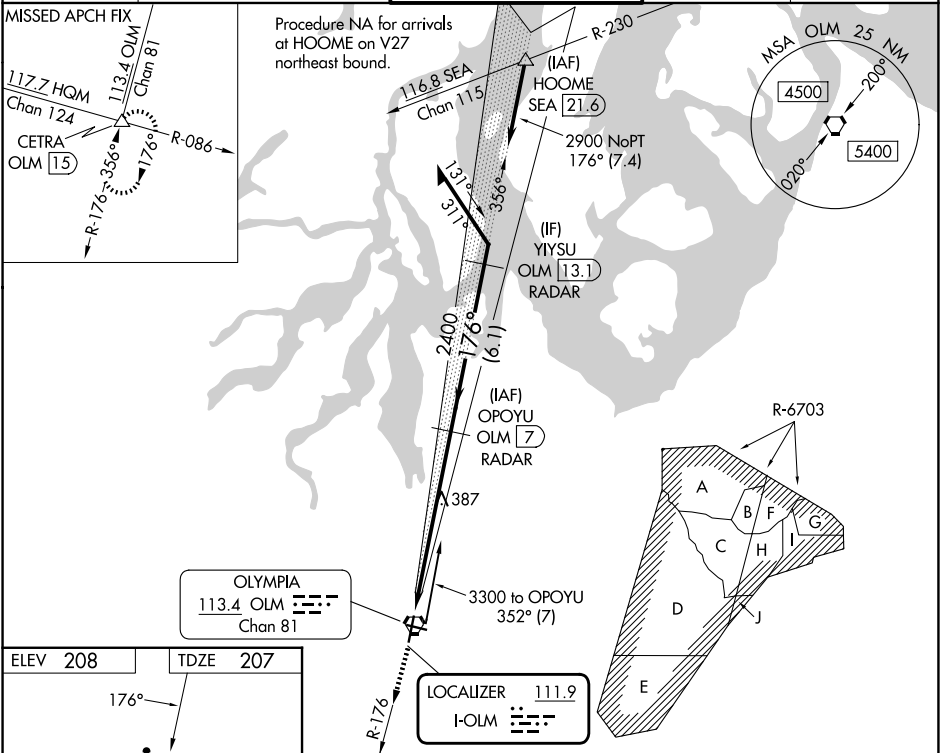

1400	5500	CETRA	OPOYU OLM [7] RADAR	Remain within 10 NM
OLM R-176			3300	2900
			2400	2400
			6.8 NM	GS 3.00° TCH 53
CATEGORY	A	B	C	D
S-ILS 17	407-½ 200 (200-½)			
S-LOC 17	680-½ 473 (500-½)		680-1 473 (500-1)	
CIRCLING	720-1 512 (600-1)	860-1 652 (700-1)	1020-2½ 812 (900-2½)	1020-2¾ 812 (900-2¾)