
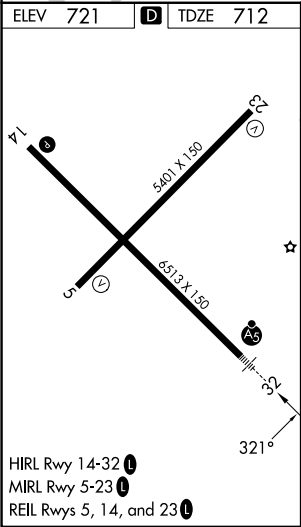


LOC/DME I-PLN 111.3 Chan 50	APP CRS 321°	Rwy Ldg TDZE 712 Apt Elev 721	ILS or LOC RWY 32 PELLSTON RGNL/EMMET COUNTY (PLN)
---	------------------------	---	---

DME required.	MALSR AS	MISSED APPROACH: Climb to 1400 then climbing right turn to 2600 on heading 160° and APN VORTAC R-302 to EDDIS/ I-PLN 14 DME and hold.
▼ Circling Rwy 5, 14 NA at night. Autopilot coupled approach NA below 1868 feet. ▲ When local altimeter setting not received, use MGN altimeter setting and increase S-ILS 32 DA to 942 feet. Increase all MDAs 40 feet. For inop ALS, increase S-LOC 32 Cat C/D visibility to 1 SM. VDP NA when using MGN altimeter setting.		

ASOS 119.025	MINNEAPOLIS CENTER 134.6 354.05	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

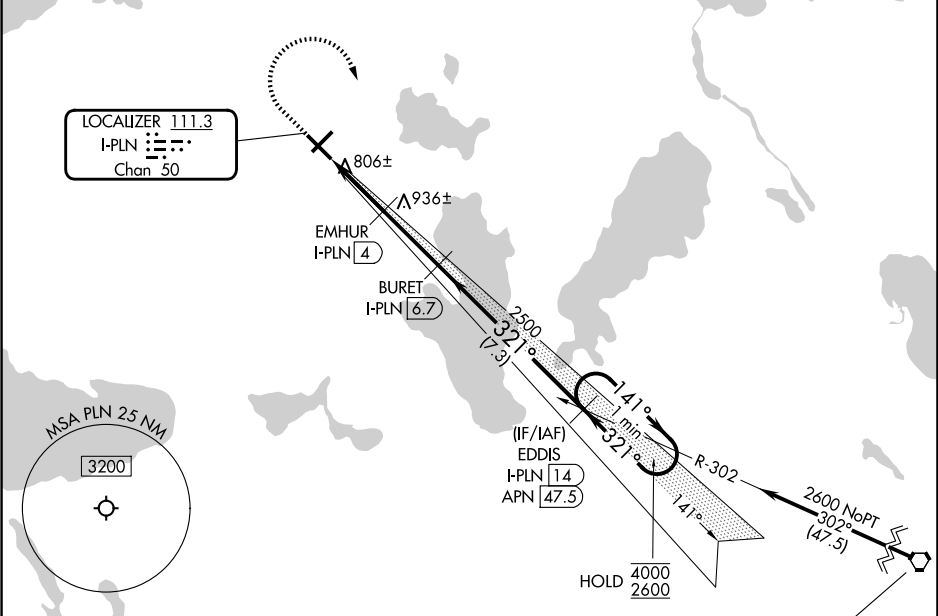

1400	2600	APN R-302	EDDIS I-PLN 14	BURET I-PLN 6.7	EDDIS I-PLN 14 APN 47.5	One Minute Holding Pattern
1400	2600	160°	1620	2500	321°	4000 2600
0.9 NM	1.8 NM	2.8 NM	7.3 NM			
CATEGORY	A	B	C	D		
S-ILS 32	912-1/2	200 (200-1/2)				
S-LOC 32	1060-1/2	348 (400-1/2)	1060-5/8	348 (400-5/8)		
CIRCLING	1280-1 559 (600-1)	1320-1 599 (600-1)	1560-2 1/2 839 (900-2 1/2)	1660-3 939 (1000-3)		