

LOC I-JDP <u>108.7</u>	APP CRS 276°	Rwy Ldg 12000 TDZE 875 Apt Elev 896
----------------------------------	------------------------	--

ILS RWY 27(SA CAT I & II)
CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP APCH - GPS. From FIBSU, BREWZ, ZALD or YEYUP.

RADAR required for procedure entry at KAYDE.

T Requires specific OPSPEC, MSPEC, or LOA approval.

MALSR





MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct FLM VOR/DME and hold.

D-ATIS
134.375

CINCINNATI APP CON
119.7 363.15 (090°-269°)
123.875 363.15 (270°-089°)


CINCINNATI TOWER
118.975 360.85 (18L/36R)
118.3 (9/27, 18C/36C)
133.325 (18R/36L)

GND CON
121.7

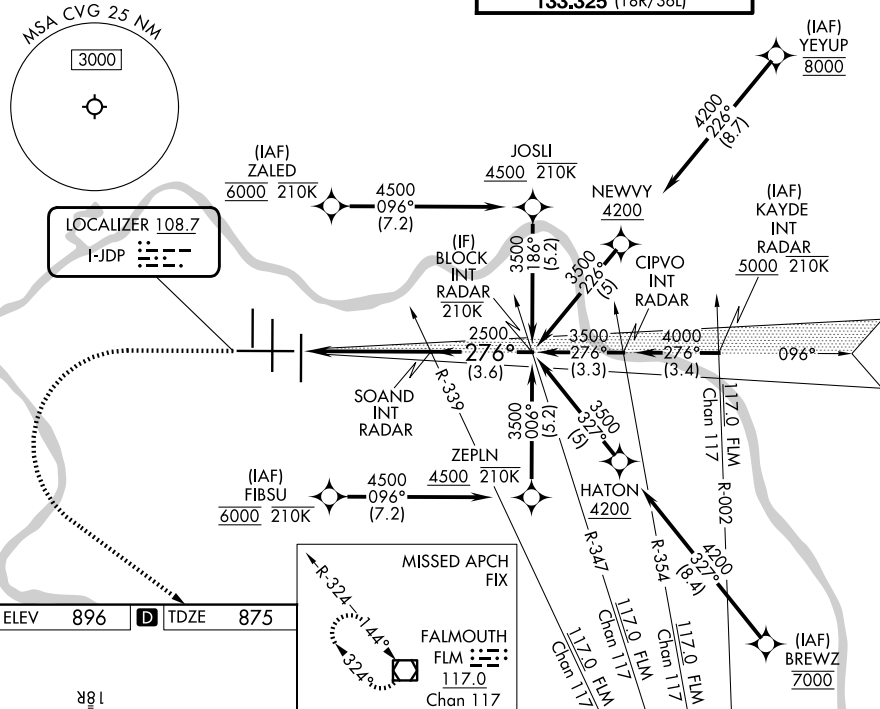

HIRL all rwys
TDZL/RCLS all rwys except 27

2000	3000	FLM	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 67).
------	------	-----	--

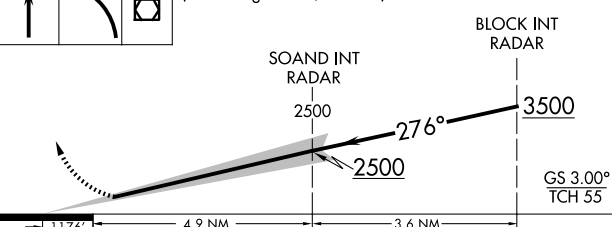

CATEGORY	A	B	C	D
S-ILS 27	SA CAT I	RA 136/14	150 DA 1025	
S-ILS 27	SA CAT II	RA 92/12	100 DA 975	

SA CATEGORY I & II ILS - SPECIAL AIRCREW
& AIRCRAFT CERTIFICATION REQUIRED