



ILS or LOC RWY 18R
CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

ALSF-2

MISSED APPROACH: Climb to 1300 then climbing right turn to 4000 on heading 270° and FLM VOR/DME R-314 to JADRO/FLM 43.3 DME/RADAR and hold.

T For inop ALS, increase S-LOC 18R Cats C and D visibility to 1 $\frac{3}{8}$ SM. Simultaneous approach authorized with Rwy 18L/C. Use of FD or AP required during simultaneous operations.

CINCINNATI TOWER
118.975 360.85 (18L/36R)
118.3 (9/27, 18C/36C)
133.325 (18R/36L)

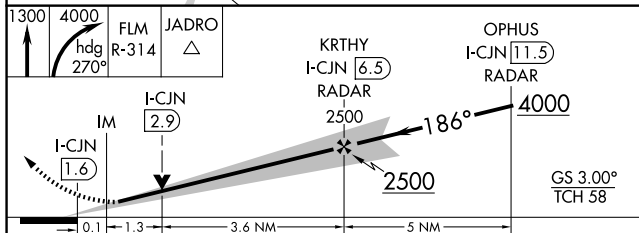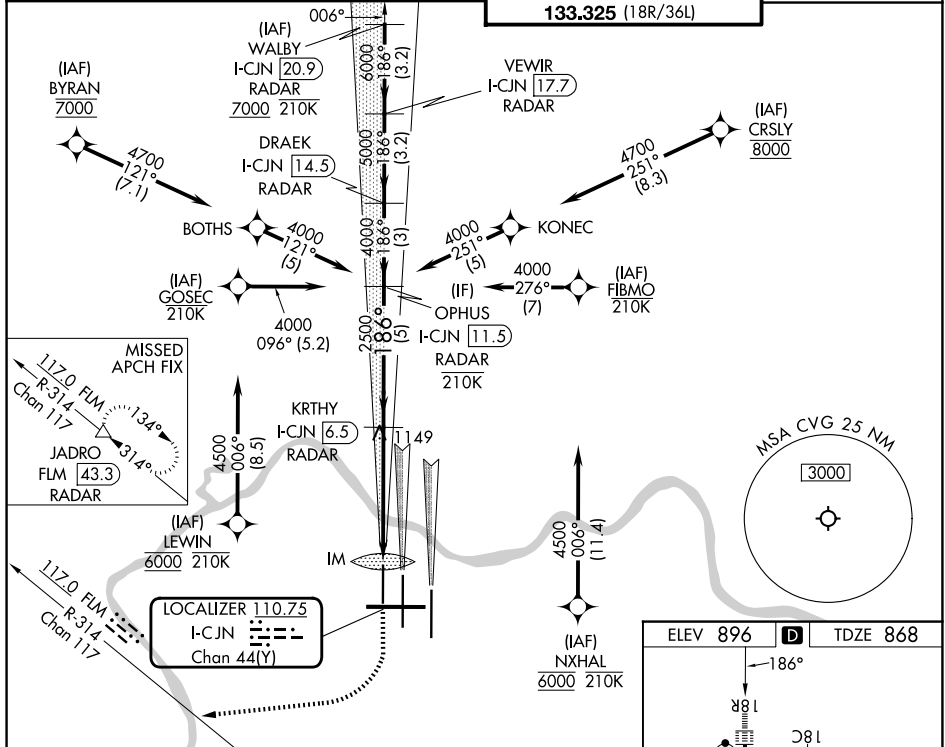

CATEGORY	A	B	C	D
S-ILS 18R	1068/18 200 (200-½)			
S-LOC 18R	1360/24 492 (500-½)		1360/50 492 (500-1)	
CIRCLING	1460-1 564 (600-1)	1560-1¾ 664 (700-1¾)		1560-2 664 (700-2)

