


APP CRS	Rwy Ldg	11000
006°	TDZE	850
	Apt Elev	896

RNAV (RNP) Z RWY 36C

CINCINNATI/NORTHERN KENTUCKY INTL (CVG)

RNP AR APCH - GPS. Authorization required. From GODAR, HOBDA, IFAYY, or LINOL: RF.	ALSF-2	MISSED APPROACH: Climb to 3000 direct LOGOZ and on track 007° to NEATS and hold.
For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. Simultaneous approach authorized. For inop ALS, increase RNP 0.30 DA all Cats visibilities to 1 3/8 SM.		

D-ATIS 134.375	CINCINNATI APP CON 119.7 363.15 (090°-269°) 123.875 363.15 (270°-089°)	CINCINNATI TOWER 118.975 360.85 (18L/36R) 118.3 (9/27, 18C/36C) 133.325 (18R/36L)	GND CON 121.7
-------------------	--	--	------------------

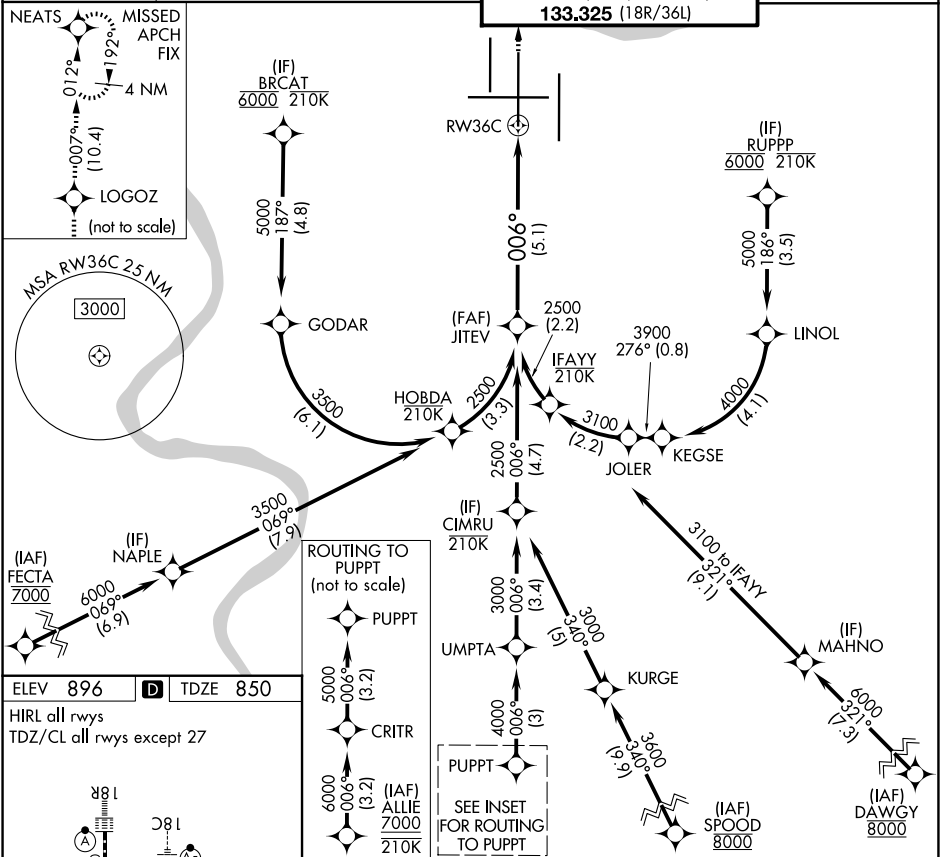

ELEV 896

TDZE 850

HIRL all rwys

TDZ/CL all rwys except 27

JITEV 2500

See planview for multiple IF locations.

GP 3.00°

TCH 52

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).

5.1 NM

3000

LOGOZ

tr 007°

NEATS

CATEGORY	A	B	C	D
RNP 0.30 DA	1318/50 468 (500-1)			

AUTHORIZATION REQUIRED

SE-1, 22 JAN 2026 to 19 FEB 2026

SE-1, 22 JAN 2026 to 19 FEB 2026