


|                                        |                        |                             |                                       |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|
| WAAS<br>CH <b>86299</b><br><b>W25A</b> | APP CRS<br><b>256°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5500</b><br><b>44</b><br><b>45</b> |
|----------------------------------------|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 25

OXNARD (OXR)

|                                                                                                                                                                                                                                                                                                                                                                           |       |                                                                                  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------------------------------------------------------------------|
| RNP APCH - GPS.                                                                                                                                                                                                                                                                                                                                                           | MALSF | MISSED APPROACH: Climb to 2000 direct PEWKI and on track 239° to SQUID and hold. |
| ⚠ Inoperative table does not apply. Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 440 feet, LNAV/VNAV DA to 437 feet. Increase all MDAs 20 feet and Circling Cat C visibility ¼ SM. |       |                                                                                  |

|                       |                                           |                                             |                         |
|-----------------------|-------------------------------------------|---------------------------------------------|-------------------------|
| ATIS<br><b>118.05</b> | POINT MUGU APP CON*<br><b>124.7 335.5</b> | OXNARD TOWER*<br><b>134.95 (CTAF) 257.8</b> | GND CON<br><b>121.9</b> |
|-----------------------|-------------------------------------------|---------------------------------------------|-------------------------|

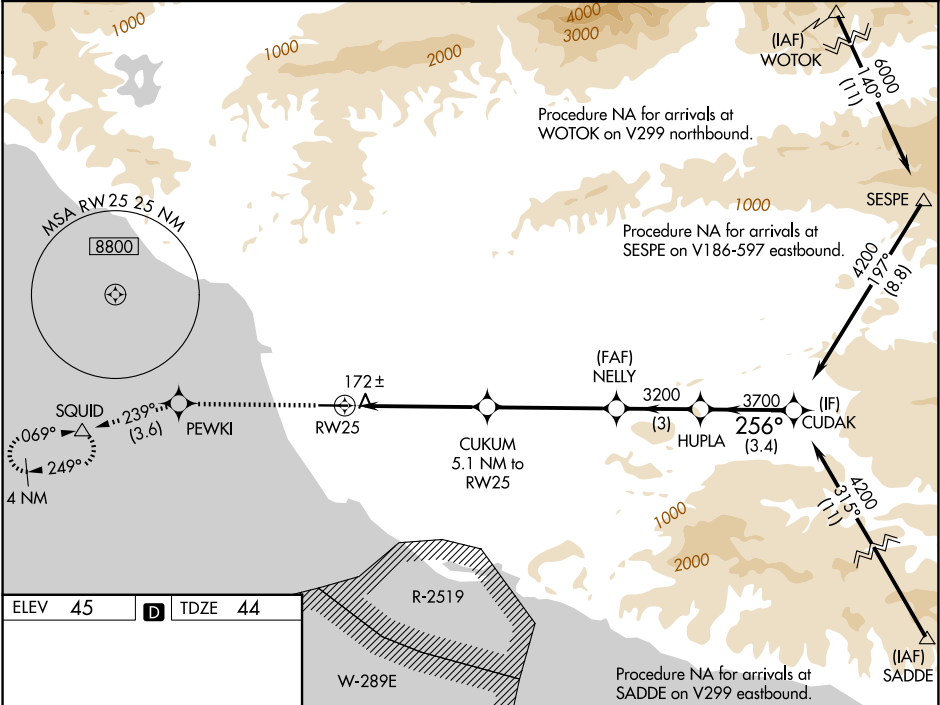

|                      |                   |                                     |
|----------------------|-------------------|-------------------------------------|
| ELEV 45              | D                 | TDZE 44                             |
|                      |                   |                                     |
| REIL Rwy 7           | MIRL Rwy 7-25     |                                     |
| 2000                 | PEWKI             | SQUID                               |
| ↑                    | tr 239°           | △                                   |
| CUKUM 5.1 NM to RW25 |                   |                                     |
| RW25                 |                   |                                     |
| 1.3 NM               |                   |                                     |
| 1.3 NM               |                   |                                     |
| 3.8 NM               |                   |                                     |
| 4.6 NM               |                   |                                     |
| 3 NM                 |                   |                                     |
| 3.4 NM               |                   |                                     |
| NELLY                |                   |                                     |
| HUPLA                |                   |                                     |
| CUDAK                |                   |                                     |
| 256°                 |                   |                                     |
| 3700                 |                   |                                     |
| 4200                 |                   |                                     |
| GP 3.00°             |                   |                                     |
| TCH 58               |                   |                                     |
| CATEGORY             | A                 | B                                   |
| LPV DA               | 424-1 380 (400-1) |                                     |
| LNAV/VNAV DA         | 421-1 377 (400-1) |                                     |
| LNAV MDA             | 520-1 476 (500-1) | 520-1 476 (500-1)                   |
| CIRCLING             | 520-1 475 (500-1) | 700-1 760-2 655 (700-1) 715 (800-2) |