

WAAS CH 72623 W07A	APP CRS 075°	Rwy Ldg TDZE Apt Elev	5954 37 45
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 7


OXNARD (OXR)

RNP APCH-GPS.

▼ Baro-VNAV NA when using Camarillo altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Camarillo altimeter setting and increase LPV DA to 305 feet, increase LNAV/VNAV DA to 337 feet; increase all MDAs 20 feet and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 500, then climbing right turn to 3000 direct UVICA and hold.

ATIS 118.05	POINT MUGU APP CON★ 124.7 335.5	OXNARD TOWER★ 134.95 (CTAF) 257.8	GND CON 121.9
-----------------------	---	---	-------------------------

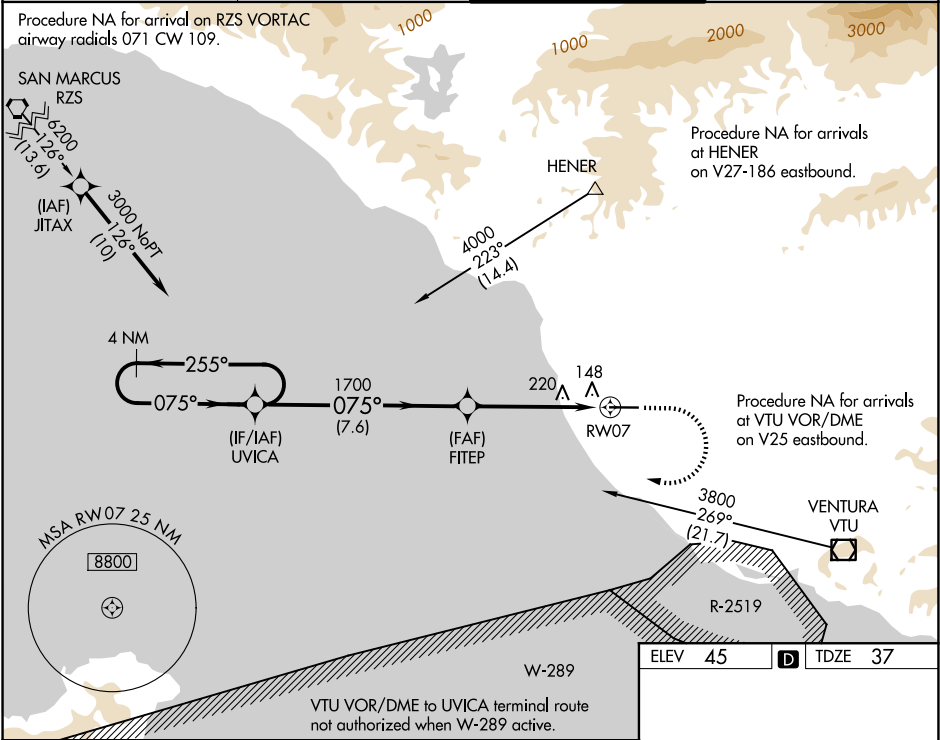

4 NM Holding Pattern

UVICA

FITEP

3000

GP 3.00° TCH 40

255°

075°

075°

1700

1700

RW07

7.6 NM

5.1 NM

500

3000

UVICA

CATEGORY	A	B	C	D
LPV DA	287-1		250 (300-1)	
LNAV/VNAV DA	319-1		282 (300-1)	
LNAV MDA	480-1	443 (500-1)	480-1 ³ / ₈	443 (500-1 ³ / ₈)
CIRCLING	500-1 455 (500-1)	520-1 475 (500-1)	700-1 ³ / ₄ 655 (700-1 ³ / ₄)	760-2 ¹ / ₄ 715 (800-2 ¹ / ₄)

ELEV 45 TDZE 37

075°

5953 X 100

TWR

RW07

REIL Rwy 7

MIRL Rwy 7-25

SW-3, 22 JAN 2026 to 19 FEB 2026

SW-3, 22 JAN 2026 to 19 FEB 2026