

WAAS	APP CRS	Rwy Ldg	5105
CH 99423	336°	TDZE	50
W33A		Apt Elev	54

RNAV (GPS) RWY 33


CAPE COD GATEWAY (HYA)

RNP APCH - GPS.


▼ Baro-VNAV NA when using Chatham altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. When local altimeter setting not received, use Chatham altimeter setting: increase LPV DA to 332 feet; increase LNAV/VNAV DA to 393 feet; increase all MDAs 40 feet and visibility Cats C and D ¼ SM. Rwy 33 helicopter visibility reduction below ¾ SM NA. Circling Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold.


MISSED APPROACH: Climb to 2000 direct DUCEG and hold.

ATIS 123.8	BOSTON APP CON 118.2 284.6	HYANNIS TOWER ★ 119.5 (CTAF) 0 257.8	GND CON 118.45	UNICOM 122.95
---------------	-------------------------------	---	-------------------	------------------

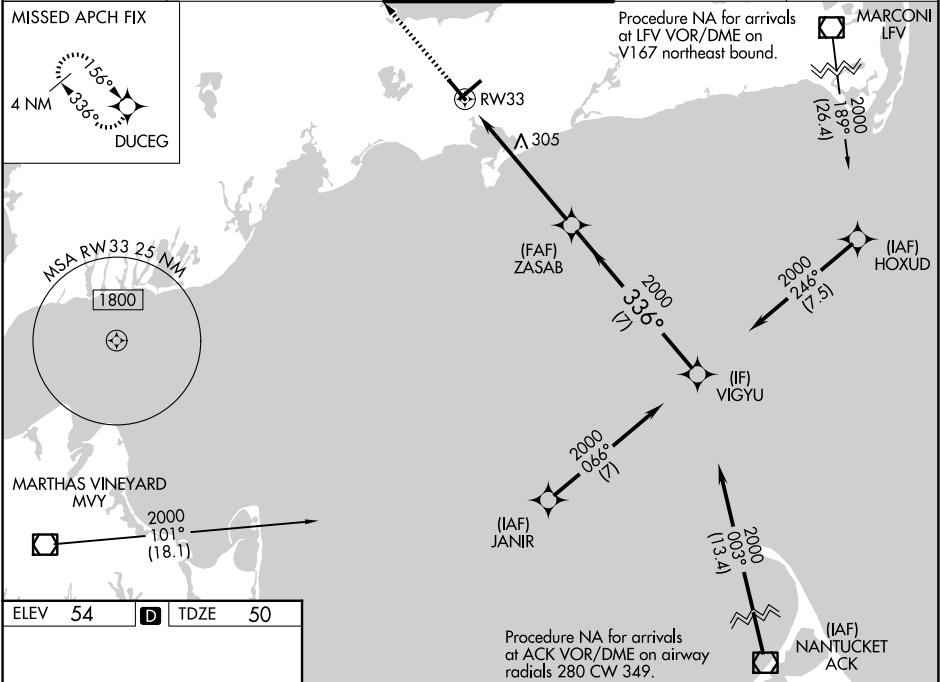

ELEV 54	D	TDZE 50
---------	---	---------

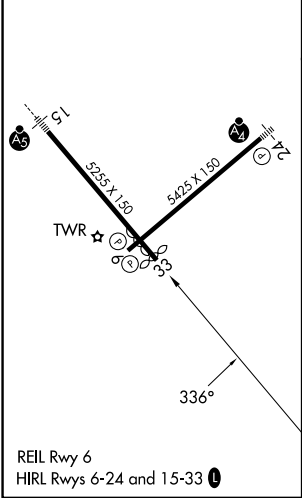

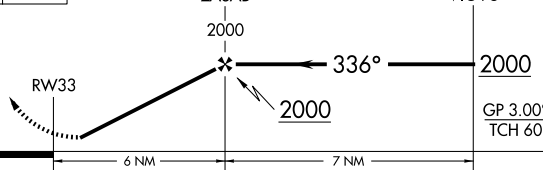2000	DUCEG	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 53).			
					
		ZASAB		VIGYU	
		2000		2000	
					
CATEGORY		A	B	C	D
LPV DA		300-1		250 (300-1)	
LNAV/ VNAV	DA	361-1		311 (400-1)	
LNAV MDA		620-1	570 (600-1)	620-1½	570 (600-1½)
CIRCLING		620-1	566 (600-1)	860-2¼ 806 (900-2¼)	860-2½ 806 (900-2½)

NE-1, 22 JAN 2026 to 19 FEB 2026

NE-1, 22 JAN 2026 to 19 FEB 2026