
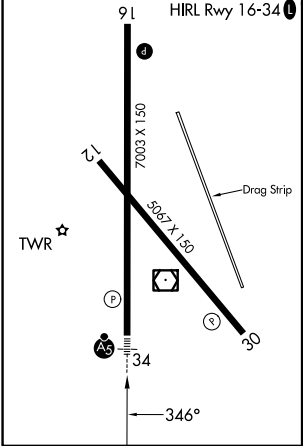


WAAS CH 56402 W34A	APP CRS 346°	Rwy Ldg TDZE Apt Elev	6997 499 505
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 34
REDDING RGNL (RDD)

RNP APCH. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cnts visibility to ¾ SM and LNAV Cat C, D visibility to 1 SM.	MALSRR 	MISSED APPROACH: Climb to 1700 then climbing right turn to 5000 direct ITMOR, continue climb-in-hold to 5000.
--	------------	---

ATIS 124.1	OAKLAND CENTER 132.2 350.3	REDDING TOWER ★ 119.8(CTAF) 0 269.25	GND CON 121.7	UNICOM 122.95
----------------------	--------------------------------------	--	-------------------------	-------------------------

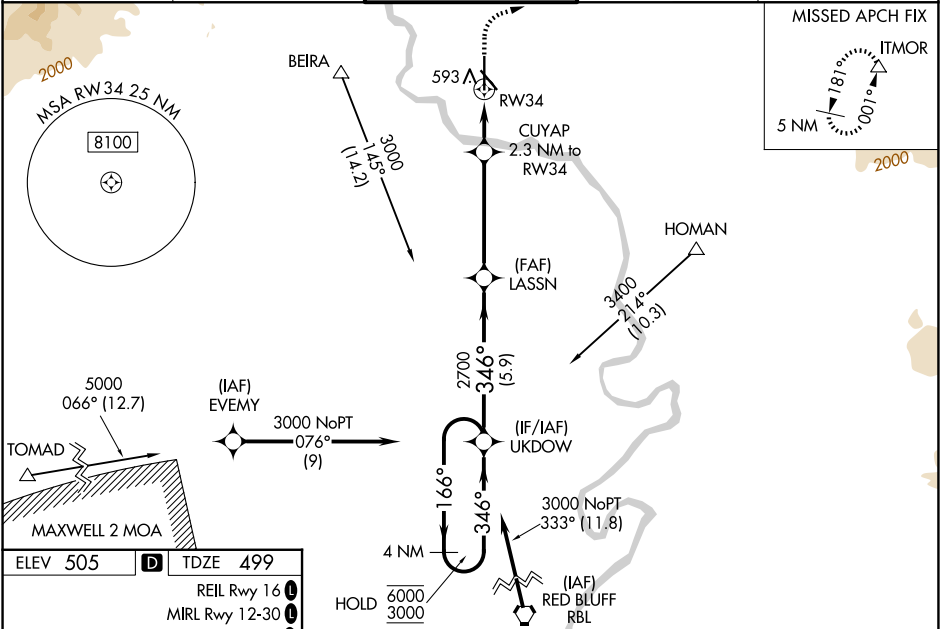

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 55).				1700	5000	ITMOR
4 NM Holding Pattern				↑	↷	△
UKDOW				*LNAV only.		
6000 ← 166° 3000 → 346° 2700 346° 2700 *1260				*1 NM to RWY34		
GP 3.00° TCH 52				*1 NM to RWY34		
4 NM Holding Pattern				*1 NM to RWY34		
CATEGORY	A	B	C	D		
LPV DA	699-½		200 (200-½)			
LNAV/VNAV DA	754-½		255 (300-½)			
LNAV MDA	860-½ 361 (400-½)		860-⅝ 361 (400-⅝)			
CIRCLING	940-1 435 (500-1)	1000-1 495 (500-1)	1120-1¾ 615 (700-1¾)	1340-2¾ 835 (900-2¾)		

SW-2, 22 JAN 2026 to 19 FEB 2026

SW-2, 22 JAN 2026 to 19 FEB 2026