

LOC I-RIW 110.5	APP CRS 284°	Rwy Ldg TDZE Apt Elev	8204 5459 5516
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 28
CENTRAL WYOMING RGNL (RIW)

NA


When local altimeter setting not received, use Lander altimeter setting: increase DA to 5713 feet; increase all MDA 60 feet and S-LOC 28 Cat C and D visibility ¼ mile. For inop MALSRL, when using Lander altimeter setting, increase S-ILS 28 all Cats visibility to ¾ mile and S-LOC 28 Cat C and D visibility to 1¾ mile. VDP NA when using Lander altimeter setting.

MALSRL

AS

MISSED APPROACH: Climb to 6800 then climbing right turn to 7700 direct RIW VOR/DME and hold, continue climb-in-hold to 7700.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

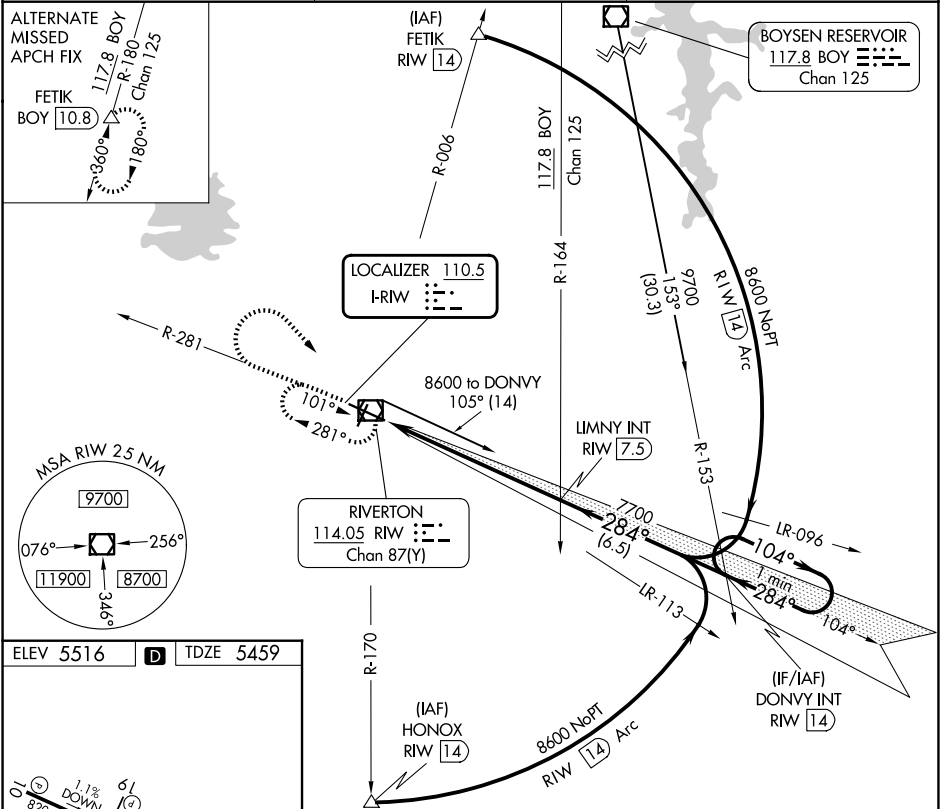

ELEV 5516 **D** TDZE 5459

REIL Rwy 1, 10 and 19 **1**
MIRL Rwy 1-19 **1**
HIRL Rwy 10-28 **1**

FAF to MAP 6.9 NM

Knots	60	90	120	150	180
Min:Sec	6:54	4:36	3:27	2:46	2:18

1-1% DOWN
0.7% UP

61
60
59
58
57
56
55
54
53
52
51
50
49
48
47
46
45
44
43
42
41
40
39
38
37
36
35
34
33
32
31
30
29
28
27
26
25
24
23
22
21
20
19
18
17
16
15
14
13
12
11
10
9
8
7
6
5
4
3
2
1
0

8204 X 150
4800 X 75
0.4% UP

284°

6800	7700	RIW	LIMNY INT RIW 7.5	DONVY INT RIW 14	One Minute Holding Pattern
↑	↷	□			
RIW 1.8	7700	284°	104°	8600	GS 3.00° TCH 50
RIW 0.6	7700	284°	104°	8600	
1.2	5.7 NM	6.5 NM			
CATEGORY	A	B	C	D	
S-ILS 28	5659-½ 200 (200-½)				
S-LOC 28	5880-½ 421 (400-½)		5880-¾ 421 (400-¾)		
CIRCLING	6000-1 484 (500-1)		6000-1½ 484 (500-1½)		
			6120-2 604 (700-2)		

NW-1, 22 JAN 2026 to 19 FEB 2026

NW-1, 22 JAN 2026 to 19 FEB 2026