




RNAV (GPS) RWY 17

KALAMAZOO/BATTLE CREEK INTL (AZO)

T Baro-VNAV NA when using BTL altimeter setting. Rwy 17 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Circling Rwy 5, 9, 27 NA at night. When local altimeter setting not received, use BTL altimeter setting: increase LPV DA to 1200 feet, LNAV/VNAV DA to 1229 feet; increase all MDAs 60 feet and Circling visibility Cats C/D $\frac{1}{4}$ SM.

MISSED APPROACH:
Climb to 2800 direct
COVAV and hold.

ATIS 127.25	GREAT LAKES APP CON ★ 121.2 239.25	KALAMAZOO TOWER ★ 118.3 (CTAF) 0 257.875	GND CON 121.9	UNICOM 122.95
----------------	---------------------------------------	---	------------------	------------------

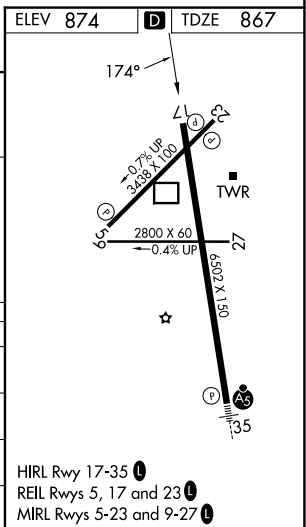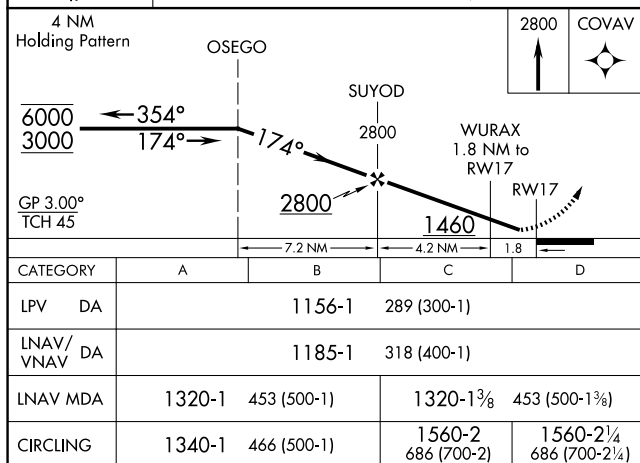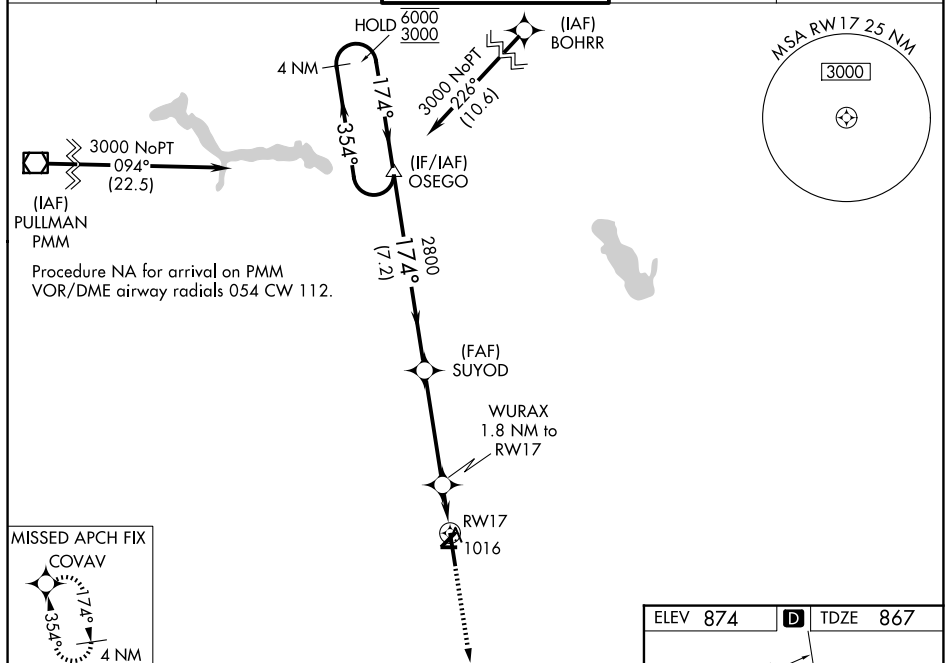

EC-1, 22 JAN 2026 to 19 FEB 2026

EC-1, 22 JAN 2026 to 19 FEB 2026