



ILS or LOC RWY 10L
FORT LAUDERDALE/HOLLYWOOD INTL (FLL)

T Simultaneous approach authorized.
A For inop ALS, increase S-LOC 10L Cats A, B visibility to RVR 5500.
 PAKEE Fix Minimums: increase S-LOC 10L Cats A/B visibility to RVR 5500,
 Cats C/D to RVR 6000.



MISSED APPROACH: Climb to 800 then climbing left turn to 4000 on FLL VOR/DME R-090 to MARTS INT/FLL 9.2 DME and hold. Continue climb-in-hold to 4000.

GND CON
121.4

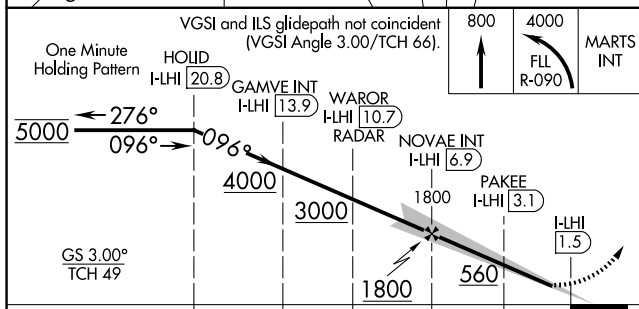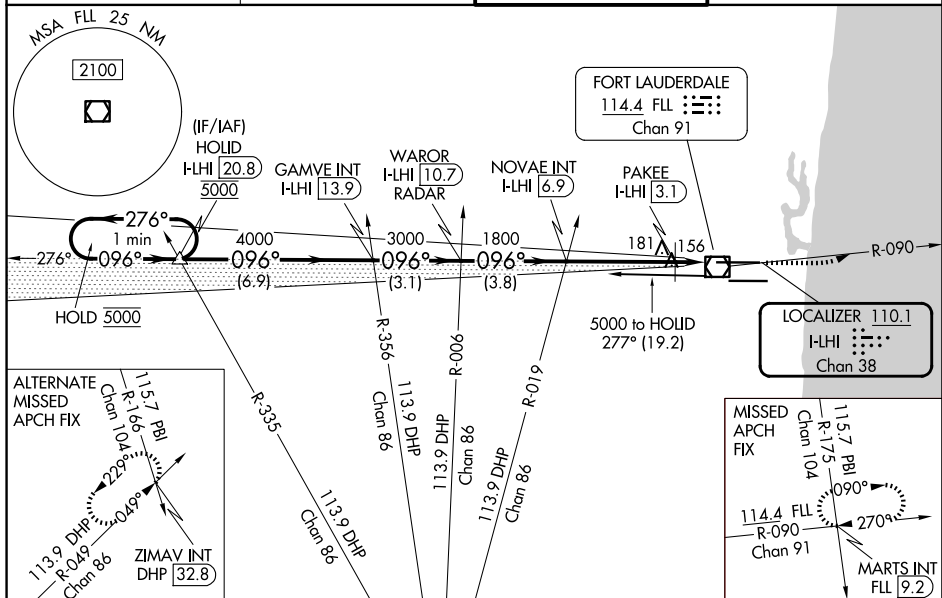

	— 6.9 NM —		— 3.1 NM —		— 3.8 NM —		— 3.9 NM —		— 1.6 NM —		
CATEGORY	A		B		C		D				
S-ILS 10L	207/24										200 (200-½)
S-LOC 10L	560/24		553 (500-½)		560/60		553 (500-1¼)				
CIRCLING	680-1		615 (700-1)		800-2		800-2¼				
					735 (800-2)		735 (800-2¼)				
PAKEE FIX MINIMUMS (DME REQUIRED)											
S-LOC 10L	420/24		413 (400-½)		420/40		413 (400-¾)				
CIRCLING	680-1		615 (700-1)		800-2		800-2¼				
					735 (800-2)		735 (800-2¼)				

