
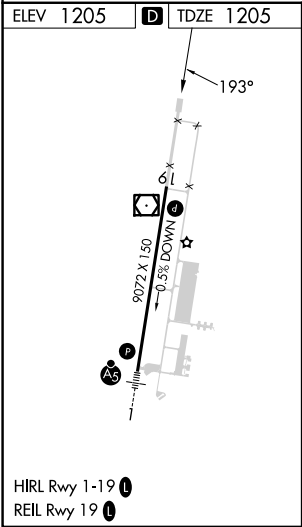


WAAS CH 86616 W19A	APP CRS 193°	Rwy Ldg TDZE Apt Elev	9072 1205 1205
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
MARQUETTE/SAWYER RGNL (SAW)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.			MISSED APPROACH: Climb to 3500 direct EVYIP and hold.	
AWOS-3PT 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7

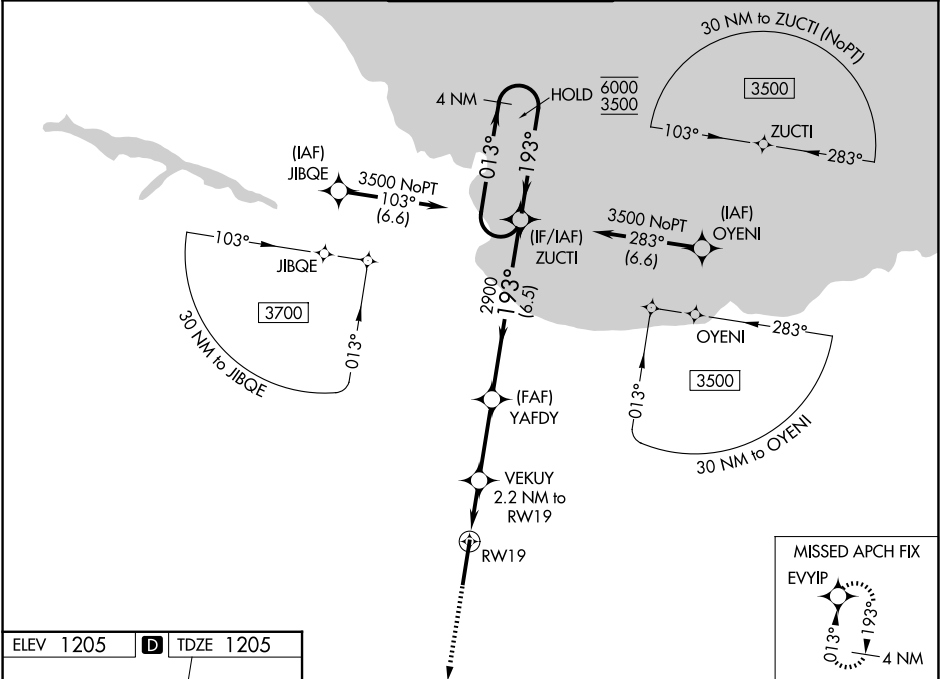

3500 ↑ EYVIP		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 53).		ZUCTI 4 NM Holding Pattern	
VEKUY 2.2 NM to RW19		YAFDY 2900		6000 3500	
RW19 1.6 NM to RW19		1960 2900		GP 3.00° TCH 60	
1.6 NM		0.6 NM		2.9 NM	
CATEGORY		A		B	
LPV DA		1405-¾		200 (200-¾)	
LNAV/VNAV DA		1522-⅞		317 (400-⅞)	
LNAV MDA		1620-1		415 (500-1)	
CIRCLING		1680-1		475 (500-1)	