


WAAS CH 56608 W09A	APP CRS 094°	Rwy Ldg TDZE 1016 Apt Elev 1027
--	------------------------	---

RNAV (GPS) Y RWY 9

KANSAS CITY INTL (MCI)

RNP APCH - GPS. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LPV all Cats and LNAV/VNAV all Cats visibility to RVR 4500, and increase LNAV Cats C/D visibility to 1½ SM.		MALSR 	MISSED APPROACH: Climb to 4000 direct DUSTN and on track 092° to LYMES and hold.		
D-ATIS 128.375	KANSAS CITY APP CON 120.95 318.1	INTERNATIONAL TOWER 128.2 254.25	GND CON 121.8	CLNC DEL 135.7	CPDLC

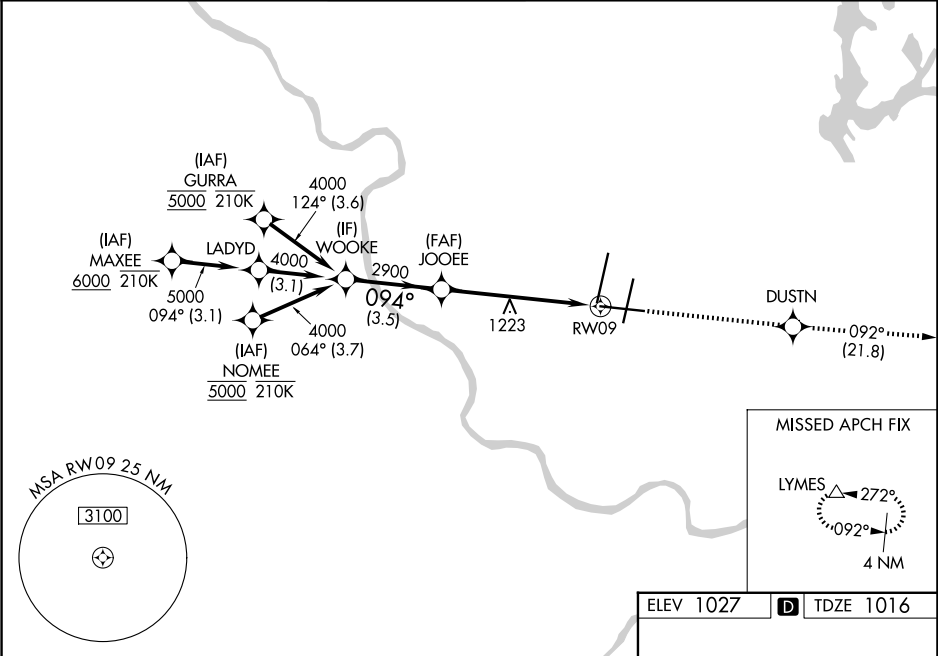

WOOKE		4000	DUSTN	tr 092°	LYMES
4000		JOOEE	2900	1.3 NM to RW09	RW09
GP 3.00°		2900	094°	3.5 NM	4.5 NM
TCH 56				1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	1316/40 300 (300-¾)				
LNAV/VNAV DA	1319/40 303 (300-¾)				
LNAV MDA	1480/24	464 (500-½)	1480/50	464 (500-1)	
CIRCLING	1540-1	513 (600-1)	1540-1½	513 (600-1½)	1580-2
				553 (600-2)	

