

WAAS	APP CRS	Rwy Idg	5343
CH 97421	053°	TDZE	124
W05A		Apt Elev	125

RNAV (GPS) RWY 5

LUMBERTON RGNL (LBT)

RNP APCH - GPS.


▼

▲

When local altimeter setting not received, use Maxton altimeter setting: increase LPV DA to 383 feet; LNAV/VNAV DA to 594 feet and all visibility ¼ SM; increase all MDAs 60 feet and LNAV visibility Cat C and Circling Cat C ¼ SM. Baro-VNAV and VDP NA when using Maxton altimeter setting. Circling Rwy 13, 31 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 2000 direct
WIVGA and hold.

ASOS 134.775	FAYETTEVILLE APP CON 133.0 290.25	UNICOM 122.8 (CTAF) 0
-----------------	--------------------------------------	--------------------------

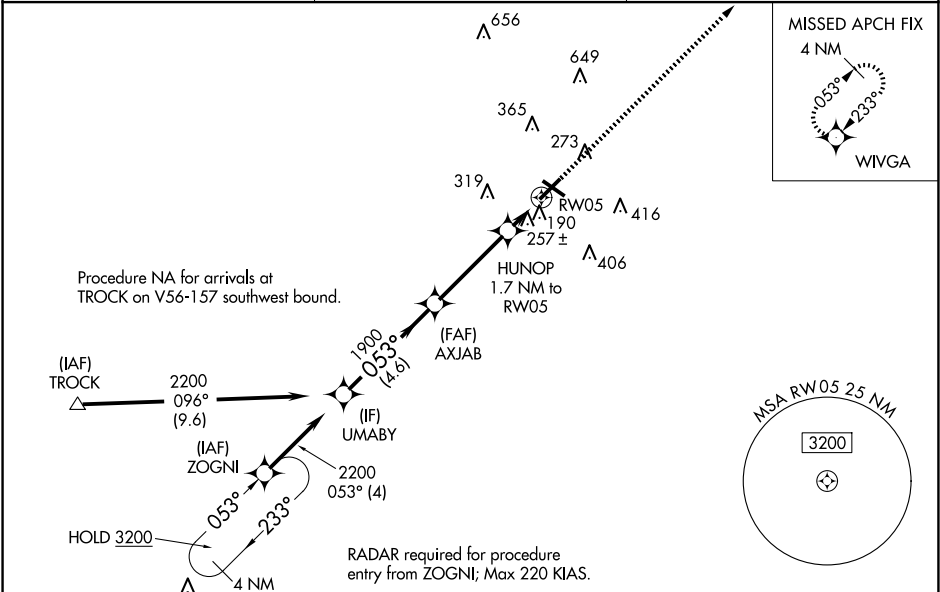

2114				ELEV 125	TDZE 124
UMABY <u>2200</u> Procedure Turn NA GP 3.00° TCH 60 053° AXJAB 1900 HUNOP 1.7 NM to RW05 * 1.1 NM to RW05 <u>1900</u> <u>720*</u> 2000 WVGA * LNAV only.					
CATEGORY	A	B	C	D	
LPV DA	327-3/4 203 (300-3/4)			NA	
LNAV/VNAV DA	538-1 1/8 414 (500-1 1/8)			NA	
LNAV MDA	520-1 396 (400-1)		520-1 1/8 396 (400-1 1/8)	NA	
CIRCLING	660-1 535 (600-1)		720-1 1/2 595 (600-1 1/2)	NA	
				MIRL Rwy 5-23 0 REIL Rws 5 and 23 0	