

WAAS CH 87007 W33A	APP CRS 326°	Rwy Ldg TDZE 2193 Apt Elev 2193
--	------------------------	---


RNAV (GPS) RWY 33

ONTARIO MUNI (ON0)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. Baro-VNAV and VDP NA when using Caldwell altimeter setting. When local altimeter setting not received, use Caldwell altimeter setting and increase all DA to 2541 feet and increase LPV and LNAV/VNAV visibility ¾ SM all Cats; increase all MDA 100 feet and increase LNAV Cat C and D ¾ SM and Circling Cat C visibility ¼ SM. Circling Rwy 15 NA at night. Rwy 33 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 9000 direct ZEMTI and on track 327° to HOVEL and hold, continue climb-in-hold 9000.

ASOS 135.275	SALT LAKE CENTER 128.05 306.95	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

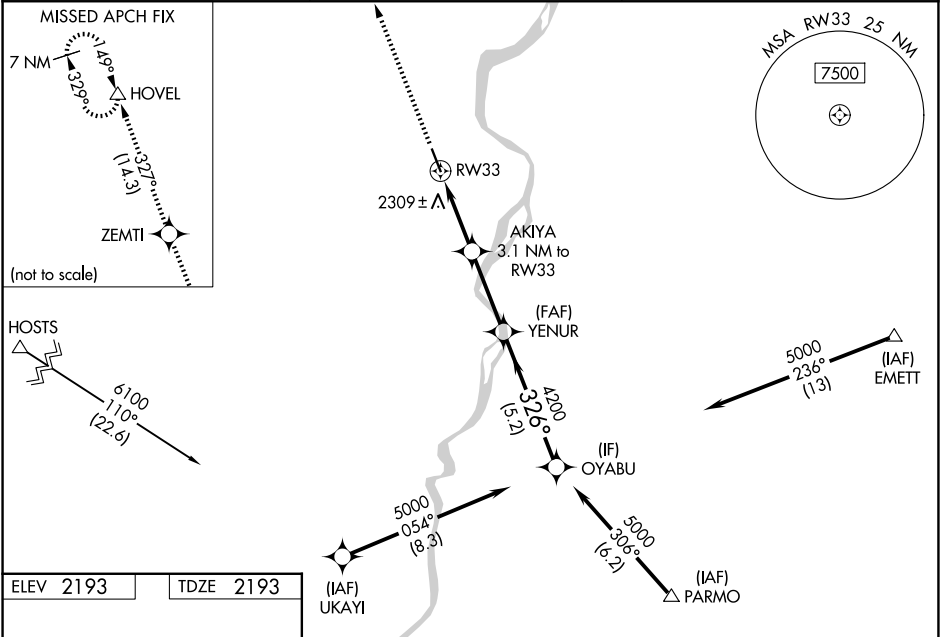

MRL Rwy 15-33
REIL Rwys 15 and 33

9000

↑

ZEMTI

✧

tr 327°

HOVEL

△

*LNAV only

AKIYA 3.1 NM to RW33

YENUR 4200

OYABU 5000

*1 NM to RW33

3200*

4200

GP 3.00° TCH 40

1 NM

2.1 NM

3.1 NM

5.2 NM

CATEGORY	A	B	C	D
LPV DA	2443-7/8 250 (300-7/8)			
LNAV/VNAV DA	2443-7/8 250 (300-7/8)			
LNAV MDA	2560-1 367 (400-1)			
CIRCLING	2760-1 567 (600-1)	2800-1 607 (700-1)	3120-2¾ 927 (1000-2¾)	3240-3 1047 (1100-3)