



WAAS CH 53504 W31A	APP CRS 311°	Rwy Ldg 9200 TDZE 354 Apt Elev 366
--	------------------------	---

RNAV (GPS) RWY 31
EAST TEXAS RGNL (GGG)

RNP APCH - GPS		MISSED APPROACH: Climb to 2600 direct BOSME and hold.		
Baro-VNAV and VDP NA when using Gilmer altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Gilmer altimeter setting and increase all DA 59 feet, all MDA 60 feet. Increase LPV visibility all Cats ¼ SM and Circling visibility Cats C/D/E ¼ SM.				
ATIS 119.65	LONGVIEW APP CON★ 124.675 257.975	EASTEX TOWER★ 119.2(CTAF) 0377.05	GND CON 121.6	UNICOM 122.95

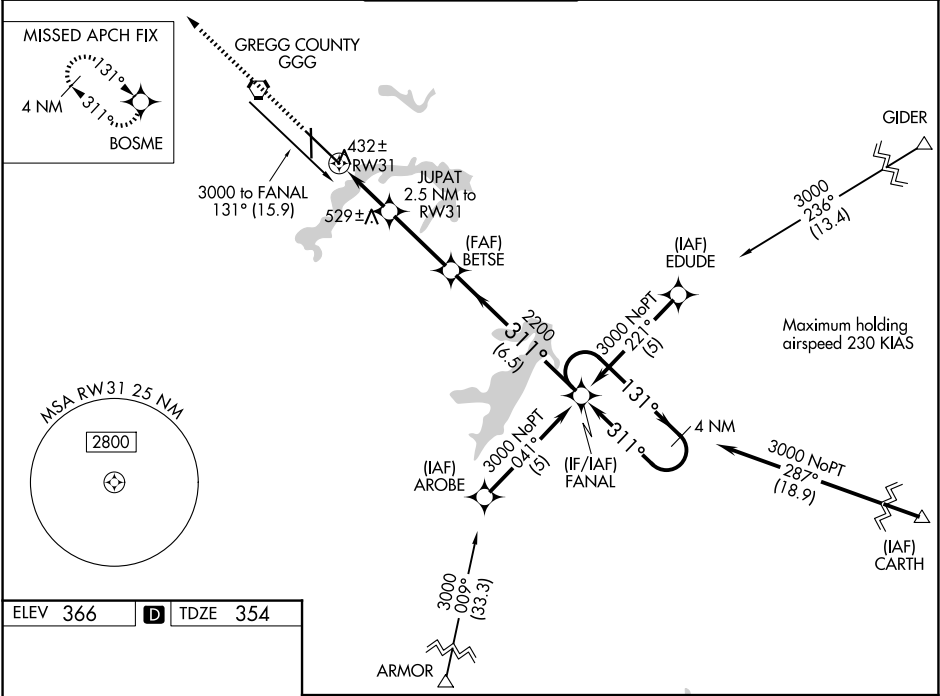

ELEV 366	D	TDZE 354
-----------------	----------	-----------------

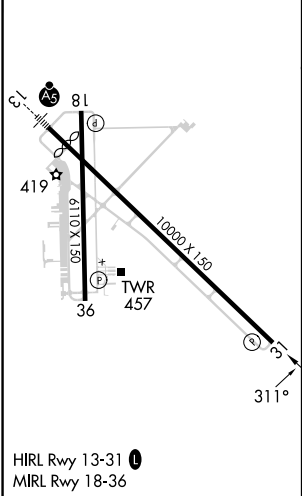

--	--