

WAAS CH 72925 W04A	APP CRS 035°	Rwy Idg 5658 TDZE 2380 Apt Elev 2380
--	------------------------	---

RNAV (GPS) RWY 4


AVENGER FLD (SWW)

⚠

Baro-VNAV NA when using Snyder altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 29°C (84°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Snyder altimeter setting and increase LPV DA to 2702 feet and LNAV/VNAV DA to 2799 feet, and all MDAs 80 feet; increase LPV visibility all Cats ⅓ SM, LNAV/VNAV visibility all Cats ¼ SM, LNAV visibility Cats C/D ⅓ SM, and Circling Cats C/D visibility ¼ SM. When VGSI inop, Straight-in/ Circling Rwy 4 procedure NA at night. When VGSI inop, Circling Rwy 17 and 22 NA at night.

MISSED APPROACH:
Climb to 4400 direct
AWBIR and hold.

AWOS-3 119.025	ABILENE APP CON 127.2 282.3	UNICOM 122.8 (CTAF)
--------------------------	---------------------------------------	-------------------------------

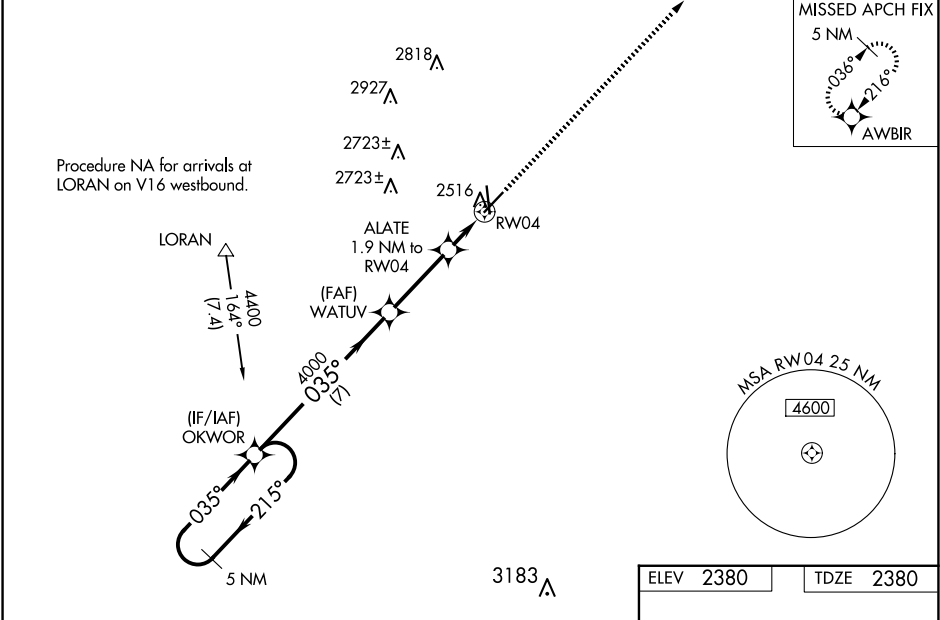

5 NM Holding Pattern		OKWOR		4400	AWBIR
4400 ← 215°		→ 035°		4000	
GP 3.00° TCH 40		035°		4000	
		WATUV		4000	
		ALATE 1.9 NM to RW04		*3020	*LNAV only.
		RW04			
		7 NM		3.1 NM	1.9 NM
CATEGORY	A	B	C	D	
LPV DA	2630-1		250 (300-1)		
LNAV/VNAV DA	2727-1 ⅓		347 (400-1 ⅓)		
LNAV MDA	2820-1 440 (500-1)		2820-1 ¼ 440 (500-1 ¼)		
CIRCLING	2880-1 500 (500-1)		3080-2 700 (700-2) 3080-2 ¼ 700 (700-2 ¼)		

