

LOC/DME I-HQM

108.7

Chan 24

APP CRS

241°

Rwy Idg

5000

TDZE

16

Apt Elev

18

ILS or LOC RWY 24

BOWERMAN FLD (HQM)

DME required.



⚠

Circling NA northwest of Rwy 6-24. When local altimeter setting not received, procedure NA. For inop ALS, increase S-ILS 24 Cat C visibility to ¾ and S-LOC 24 Cat C visibility to 1 ½ SM.

MALSR

MISSED APPROACH: Climb to 2500 direct HQM VORTAC and hold.

ASOS 135.775	SEATTLE CENTER 128.3 269.0	UNICOM 122.7 (CTAF) 1
-----------------	-------------------------------	--------------------------

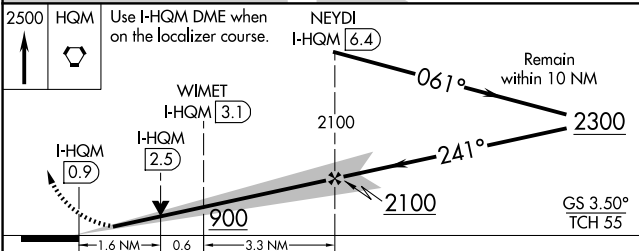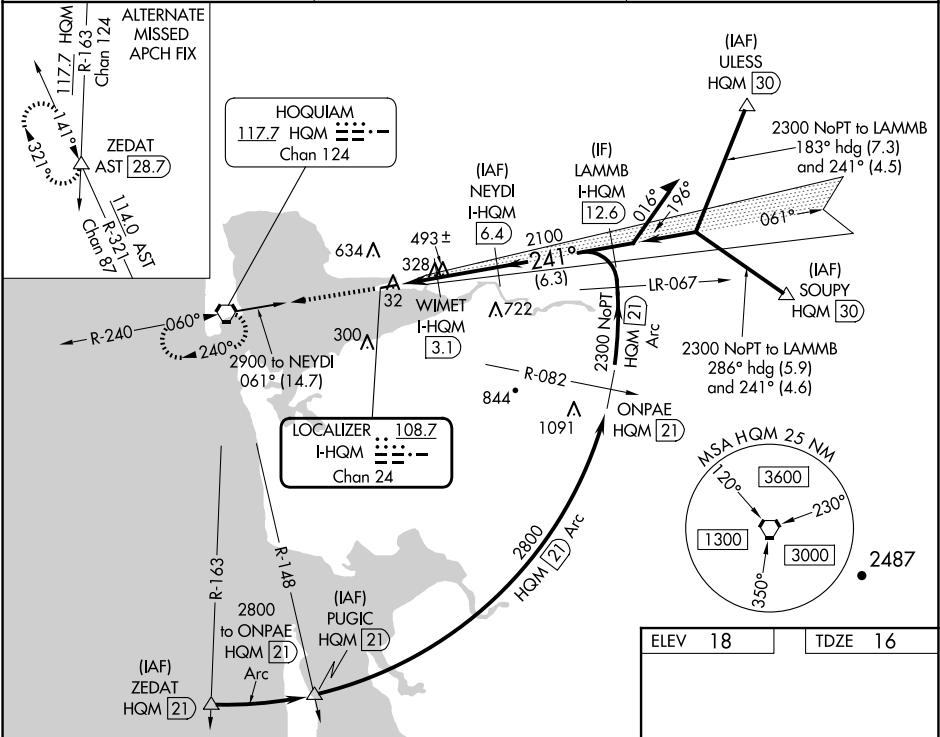

CATEGORY	A	B	C	D
S-ILS 24	216-½ 200 (200-½)		286-½ 270 (300-½)	NA
S-LOC 24	580-½ 564 (600-½)		580-1¼ 564 (600-1¼)	NA
CIRCLING	580-1 562 (600-1)		800-2¼ 782 (800-2¼)	NA

ELEV 18

TDZE 16

REIL Rwy 6 1
HIRL Rwy 6-24 1