

WAAS CH 40420 W18A	APP CRS 178°	Rwy Idg 5998 TDZE 206 Apt Elev 206
--	------------------------	---

RNAV (GPS) RWY 18
PINEBLUFF RGNL/GRIDER FLD (PBF)

RNP APCH - GPS.



V Baro-VNAV and VDP NA when using Stuttgart alimeter setting. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. When local
alimeter setting not received, use Stuttgart alimeter setting and increase LPV DA to 534 feet;
increase LNAV/VNAV DA to 723 feet and all visibilities ½ SM. Increase all MDAs 80 feet and
LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ¼ SM. For inop ALS, increase
LNAV Cats A/B visibility to 1 SM and Cats C/D visibility to 1½ SM. For inop ALS
when using Stuttgart alimeter setting, increase LPV all Cats visibility to 1 SM; increase
LNAV/VNAV all Cats visibility to 1½ SM; increase LNAV Cats C/D visibility 1½ SM.

MALSR



MISSED APPROACH:
Climb to 2000 direct
REROY and hold.

ASOS 120.775	LITTLE ROCK APP CON 119.85 353.6	CLNC DEL 119.85	UNICOM 123.0 (CTAF) 0
-----------------	-------------------------------------	--------------------	--------------------------

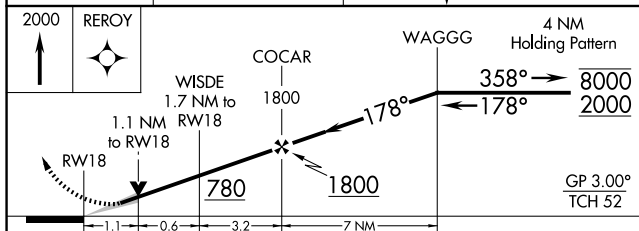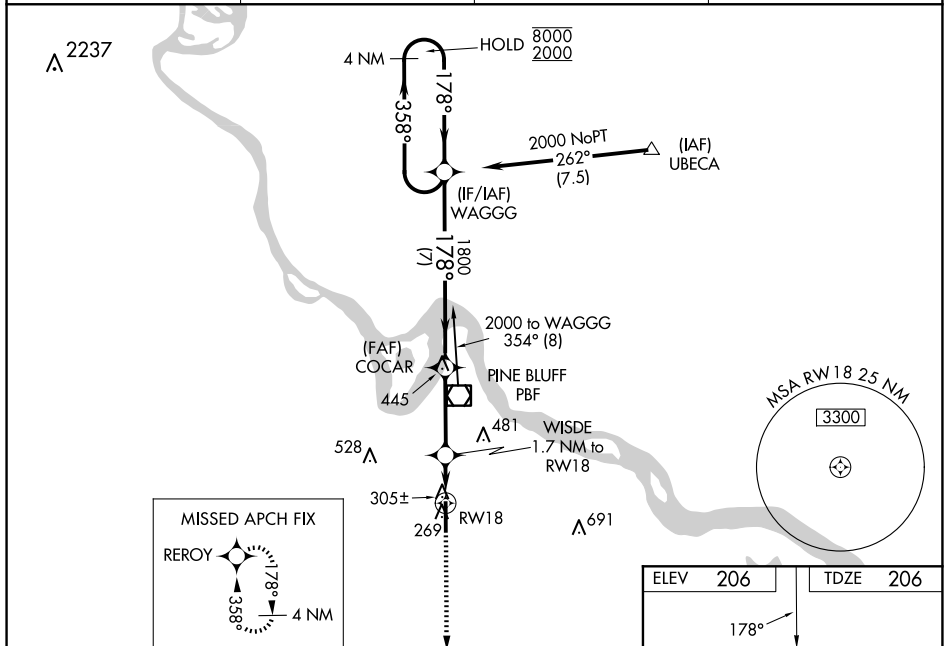

CATEGORY	A	B	C	D
LPV DA	459- ³ / ₄ 253 (300- ³ / ₄)			
LNAV/ VNAV DA	648-1 442 (500-1)			
LNAV MDA	600- ³ / ₄ 394 (400- ³ / ₄)			
CIRCLING	660-1 454 (500-1)	680-1 474 (500-1)	840-1 ³ / ₄ 634 (700-1 ³ / ₄)	880-2 ¹ / ₄ 674 (700-2 ¹ / ₄)

