

ATIS ★ 133.475 352.0	[USN]	Rwy	Knots	60	120	180	240	300	360
CLNC DEL		24L/R	V/V(fpm)	780	1560	2340	3120	3900	4680
125.975 254.325									
GND CON									
128.625 307.325									
FOSS TOWER ★									
135.2 298.925									
SOCAL DEP CON									
119.6 363.1 W									


ATC Climb Rate to 2000

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RWY 24L/R: Climbing right turn to 2000 heading 303° to intercept and proceed via NKX TACAN R-283 to SWOLF. Complete turn within NKX 2 DME. Cross NKX R-283/3 DME at 2000 mandatory. Maintain 2000 at SWOLF mandatory. Then turn left heading 256° to intercept and proceed via MZB VORTAC R-300 to TINNY int. Thence...

SAN MARCUS TRANSITION (TINNY4.RZS): ...via VTU VOR/DME R-111 to VTU, then via RZS VORTAC R-109 to RZS.

SHAFTER TRANSITION (TINNY4.EHF): ...via EHF VORTAC R-144 to EHF.

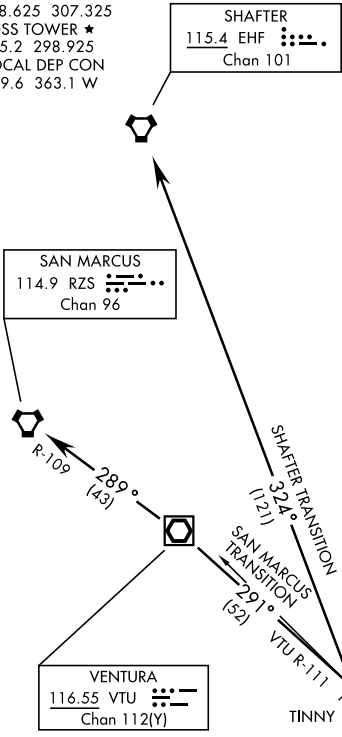

DO NOT EXCEED 300 KIAS
UNTIL INTERCEPTING R-283

