

WAAS CH 78572 W32A	APP CRS 324°	Rwy Idg TDZE 153 Apt Elev 153
--	------------------------	---

RNAV (GPS) Z RWY 32

MONMOUTH EXEC (BLM)

RNP APCH - GPS.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Lakehurst altimeter setting and increase LPV DA to 442 feet, increase LNAV/VNAV DA to 442 feet. Baro-VNAV NA when using Lakehurst altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
HAVOT, track 278° to
RBV VORTAC and hold.

AWOS-3PT 121.625	MC GUIRE APP CON 126.475 363.8	CLNC DEL 126.15	UNICOM 123.0 (CTAF)
----------------------------	--	---------------------------	-------------------------------

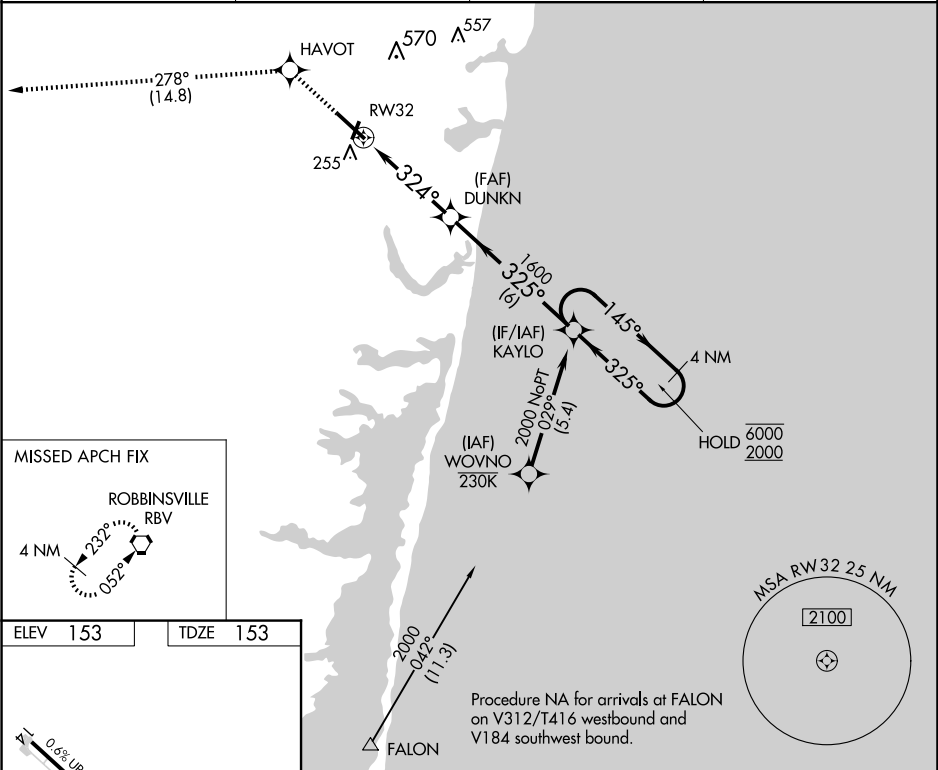

ELEV 153

TDZE 153

MIRL Rwy 14-32

REIL Rwy 14

2000

HAVOT

tr 278°

RBV

KAYLO

4 NM Holding Pattern

DUNKN

1600

RWY 32

324°

325°

145°

6000

2000

GP 3.10°

TCH 51

4.2 NM

6 NM

CATEGORY	A	B	C	D
LPV DA		403-1	250 (300-1)	
LNAV/VNAV DA		403-1	250 (300-1)	