

LOC/DME I-FNU 110.15 Chan 38 (Y)	APP CRS 275°	Rwy Ldg 11002 TDZE 45 Apt Elev 55
--	------------------------	--


ILS or LOC RWY 27R
ORLANDO SANFORD INTL (ST'B)

▼ For inop ALS, increase PESIY FIX minimums
▲ Cat C/D visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 500 then climbing right turn to 2800 on heading 280° and ORL VORTAC R-355 to PAOLA INT/ORL 15.6 DME and hold, continue climb-in-hold to 2800.

ATIS 125.975	ORLANDO APP CON 135.3 351.9 (N) 125.225 351.9 (S)	SANFORD TOWER ★ 120.3 (CTAF) 0 254.35	GND CON 121.35 254.35
------------------------	---	---	---------------------------------

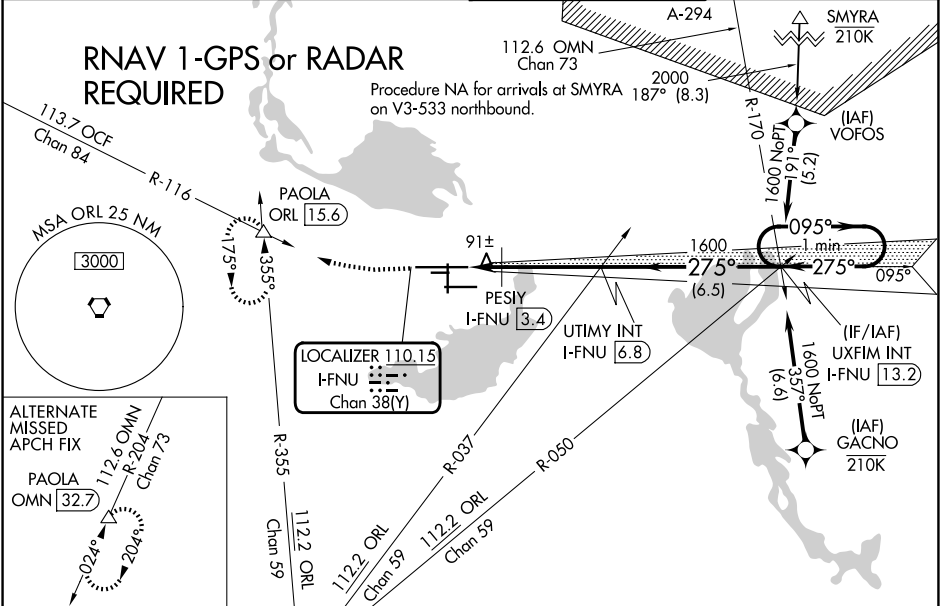

ELEV 55	D	TDZE 45	500	2800	PAOLA	VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 72).
			*LOC only. UTIMY INT I-FNU [6.8] UXFIM INT I-FNU [13.2] One Minute Holding Pattern GS 3.00° TCH 55			
			CATEGORY A B C D			
			S-ILS 27R 245-½ 200 (200-½)			
			S-LOC 27R 480-½ 435 (500-½) 480-¾ 435 (500-¾)			
			CIRCLING 580-1 525 (600-1) 600-1½ 545 (600-1½) 640-2 585 (600-2)			
			PESIY FIX MINIMUMS			
			S-LOC 27R 400-½ 355 (400-½) 400-⅝ 355 (400-⅝)			
			CIRCLING 580-1 525 (600-1) 600-1½ 545 (600-1½) 640-2 585 (600-2)			