

WAAS CH 87006 W22A	APP CRS 224°	Rwy Idg TDZE Apt Elev	7301 913 913
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

CHIPPEWA VALLEY RGNL (EAU)

RNP APCH.

▼

Baro-VNAV and VDP NA when using Rice Lake altimeter setting. For uncompensated

▲


Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received, use Rice Lake altimeter setting and increase LPV DA to 1223, LNAV/VNAV DA to 1285, and increase LNAV/VNAV visibility all Cats ¼ SM; increase all MDA 120 feet and LNAV Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM. For inop ALS increase LNAV/VNAV visibility all Cats to ¾ SM and LNAV Cats C/D visibility to 1 SM. For inop ALS when using Rice Lake altimeter setting increase LPV visibility all Cats to 1 SM and LNAV Cats C/D visibility to 1¾ SM.

MALSR

AS

MISSED APPROACH:
Climb to 1320 then
climbing right turn to
3500 direct IROKE
and hold.

ATIS 126.025	MINNEAPOLIS CENTER 125.3 335.6	EAU CLAIRE TOWER ★ 118.575 (CTAF) 0	GND CON 120.925	UNICOM 122.95
------------------------	--	---	---------------------------	-------------------------

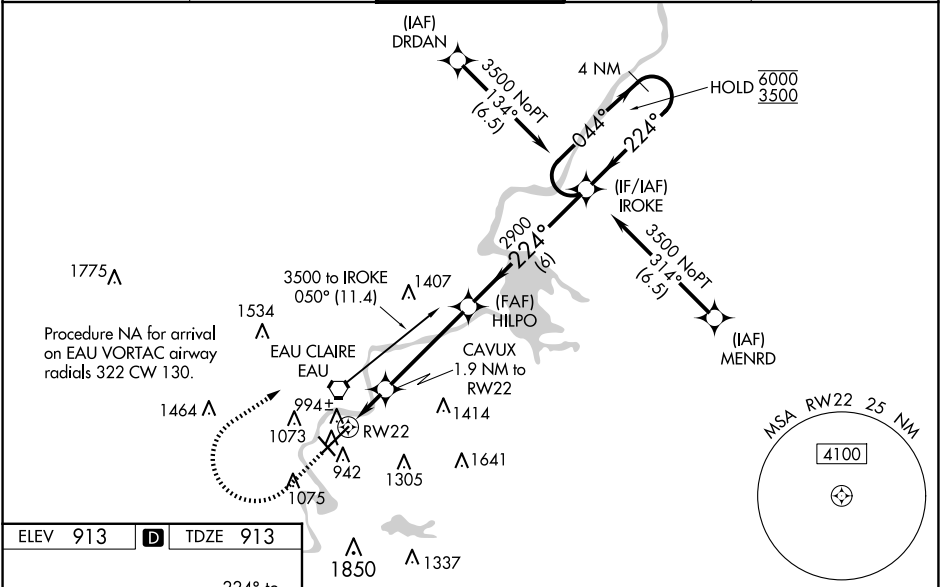

ELEV 913

D

TDZE 913

224° to RW22

3500

IROKE

1320

*LNAV only

CAVUX 1.9 NM to RW22

*0.9 NM to RW22

RW22

*1560

HILPO 2900

IROKE 4 NM Holding Pattern

044° → 6000

← 224° 3500

GP 3.00°

TCH 50

CATEGORY	A	B	C	D
LPV DA	1113-½		200 (200-½)	
LNAV/VNAV DA	1175-½		262 (300-½)	
LNAV MDA	1260-½	347 (400-½)	1260-⅝	347 (400-⅝)
CIRCLING	1480-1 567 (600-1)	1540-1 627 (700-1)	1660-2¼ 747 (800-2¼)	2200-3 1287 (1300-3)