

LOC/DME I-CGI
109.5
Chan **32**

APP CRS
108°

Rwy Ldg
TDZE **337**
Apt Elev **342**


ILS or LOC RWY 10
CAPE GIRARDEAU RGNL (CGI)

ADF required.
For inap ALS, increase S-LOC 10 Cat C/D visibility to 1½ SM.

MALSR
A5

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct DUTCH LOM/I-CGI 7.2 DME and hold.

ASOS 120.55	MEMPHIS CENTER 133.65 292.15	CAPE GIRARDEAU TOWER ★ 125.525 (CTAF) 0	GND CON 124.7	UNICOM 122.95
-----------------------	--	--	-------------------------	-------------------------

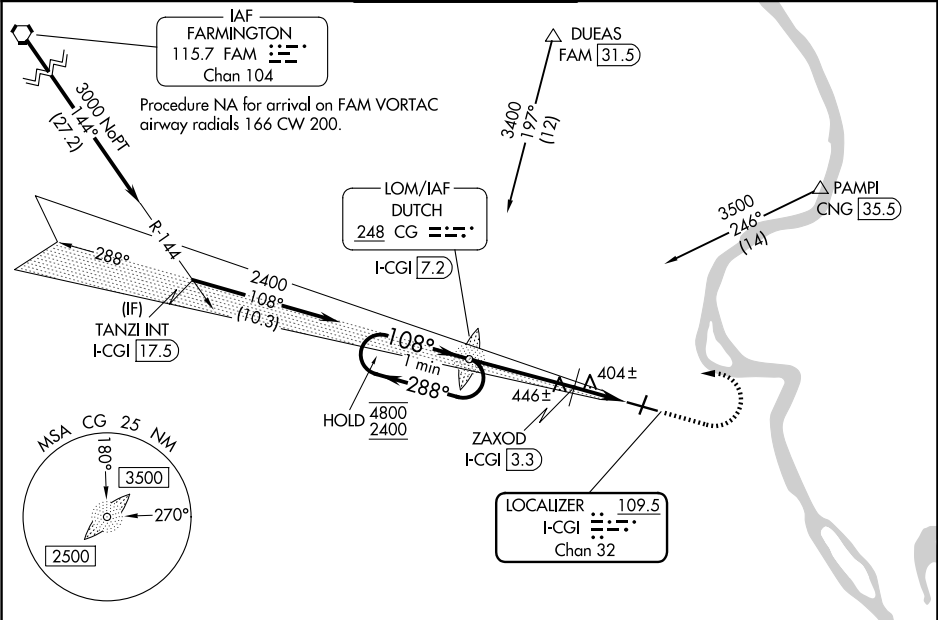

Use I-CGI DME when on the localizer course.
One Minute Holding Pattern

4800
2400

←288°
108°→

2400

2271

CG DUTCH LOM
I-CGI [7.2]

1500
2400
CG

ZAXOD
I-CGI [3.3]

I-CGI [2]
I-CGI [1.3]

1000

3.9 NM
1.2 NM
0.8 NM

GS 3.00°
TCH 54

CATEGORY	A	B	C	D		
S-ILS 10	537-½ 200 (200-½)					
S-LOC 10	1000-½ 663 (700-½)	1000-1½ 663 (700-½)				
CIRCLING	1000-1 658 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)			
ZAXOD FIX MINIMUMS						
S-LOC 10	660-½ 323 (400-½)					
CIRCLING	880-1 538 (600-1)	960-1 618 (700-1)	1000-1¾ 658 (700-1¾)	1080-2¼ 738 (800-2¼)		

ELEV 342 **D** TDZE 337

108°

07

02

28

6500 X 150

3957

TWR

MIRL Rwy 2-20
HIRL Rwy 10-28

FAF to MAP 5.9 NM

Knots	60	90	120	150	180
Min:Sec	5:54	3:56	2:57	2:22	1:58