


WAAS CH 72801 W12A	APP CRS 128°	Rwy Ldg TDZE Apt Elev	8399 873 873
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 12

WATERLOO RGNL (A.L.O)

RNP APCH.	MALSR	MISSED APPROACH: Climb to 3400 direct KUCTE and hold.
▼ ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats to RVR 5500. # RVR 1800 authorized with use of FD or AP or HUD to DA.	AS	

ATIS 120.65	DES MOINES APP CON ★ 118.9 251.15	WATERLOO TOWER ★ 125.075 (CTAF) 257.8	GND CON 121.9 269.1	UNICOM 122.95
-----------------------	---	---	-------------------------------	-------------------------

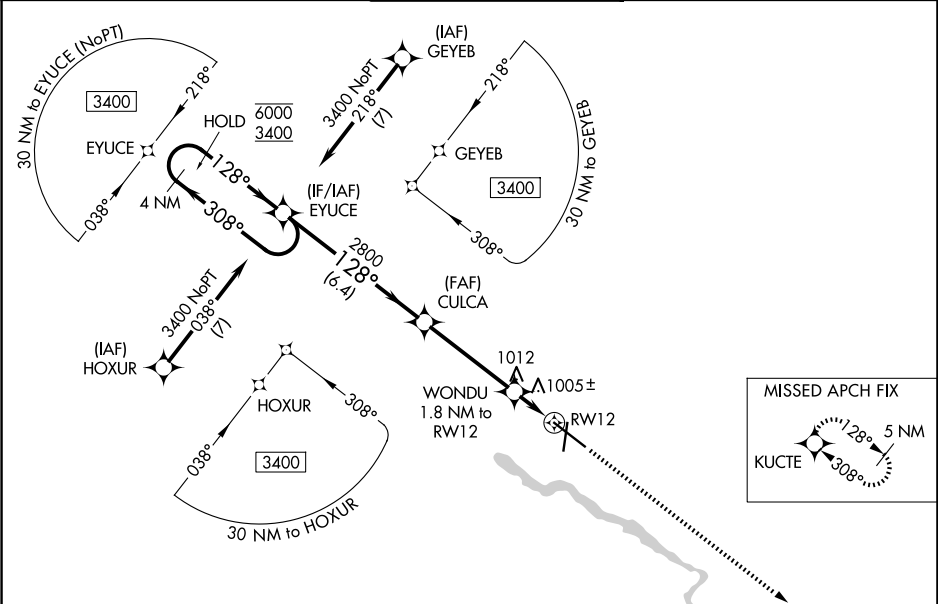

					ELEV 873		D		TDZE 873		
4 NM Holding Pattern EYUCE 6000 ← 308° 3400 → 128° GP 3.00° TCH 55					CULCA 2800 WONDU 1.8 NM to RW12 *1500 *1 NM to RW12 RW12		3400 KUCTE *LNAV only		128° AS 81 8399 X 150 6003 X 150 36 TWR AS		
CATEGORY	A		B		C		D				
LPV DA#			1073/24		200 (200-½)						
LNAV/VNAV DA			1252/30		379 (400-¾)						
LNAV MDA	1260/24		387 (400-½)		1260/35		387 (400-¾)				
CIRCLING	1360-1 487 (500-1)		1400-1 527 (600-1)		1480-1¾ 607 (700-1¾)		1600-2¼ 727 (800-2¼)				
HIRL Rwy 12-30											
MIRL Rwy 18-36											
REIL Rws 18 and 36											