

LOC/DME F-BBJ 110.9 Chan 46	APP CRS 264°	Rwy Ldg 5500 TDZE 671 Apt Elev 672
---	------------------------	---

ILS or LOC RWY 26

DME required for LOC only.



NA Circling Rwy 32 NA at night. Inop table does not apply to S-ILS 26. VDP NA when using Burlington altimeter setting. When local altimeter setting not received, use Burlington altimeter setting and increase S-ILS 26 DA to 927 feet, increase all MDAs 60 feet and Circling visibility Cat C ¼ SM. For inop ALS, increase S-LOC 26 Cats A and B visibility to 1 SM, and Cat C to ¾ SM. For inop ALS when using Burlington altimeter setting, increase S-LOC 26 all Cats visibility to 1 SM.

MALSR




MISSED APPROACH:
Climb to 2600 then
right turn direct BRL
VOR/DME and hold.

AWOS-3 118.375	KANSAS CITY CENTER 126.225 317.775	UNICOM 122.8 (CTAF) ①
--------------------------	--	---------------------------------

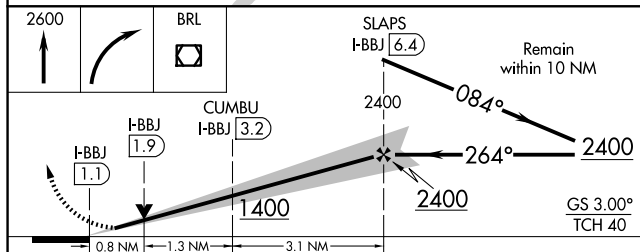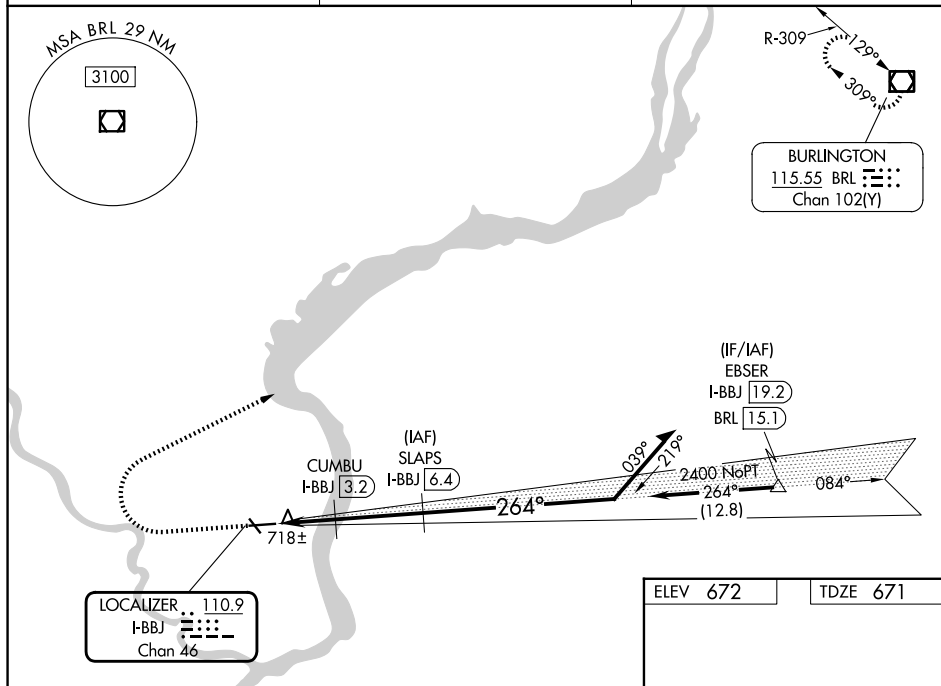

CATEGORY	A	B	C	D
S-ILS 26	871- ³ / ₄ 200 (200- ³ / ₄)			NA
S-LOC 26	980- ³ / ₄ 309 (400- ³ / ₄)			NA
CIRCLING	1180-1 508 (600-1)	1220-1 548 (600-1)	1220-1½ 548 (600-1½)	NA



REIL Rwys 8, 14, and 32 **L**
MIRL Rwys 8-26 and 14-32 **L**

ILS or LOC RWY 26