

WAAS CH 86729 W14A	APP CRS 144°	Rwy Ldg TDZE Apt Elev	4200 701 708
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 14


CLINTON MUNI (CWI)

⚠

Rwy 14 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Davenport altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Davenport altimeter setting and increase all DA 47 feet and all MDA 60 feet; increase LNAV visibility Cat C ¼ mile.

MISSED APPROACH:
Climb to 2500 direct
BELRE and hold.

AWOS-3PT 125.525	QUAD CITY APP CON ★ 125.95 257.8	UNICOM 123.075 (CTAF) ①
----------------------------	--	-----------------------------------

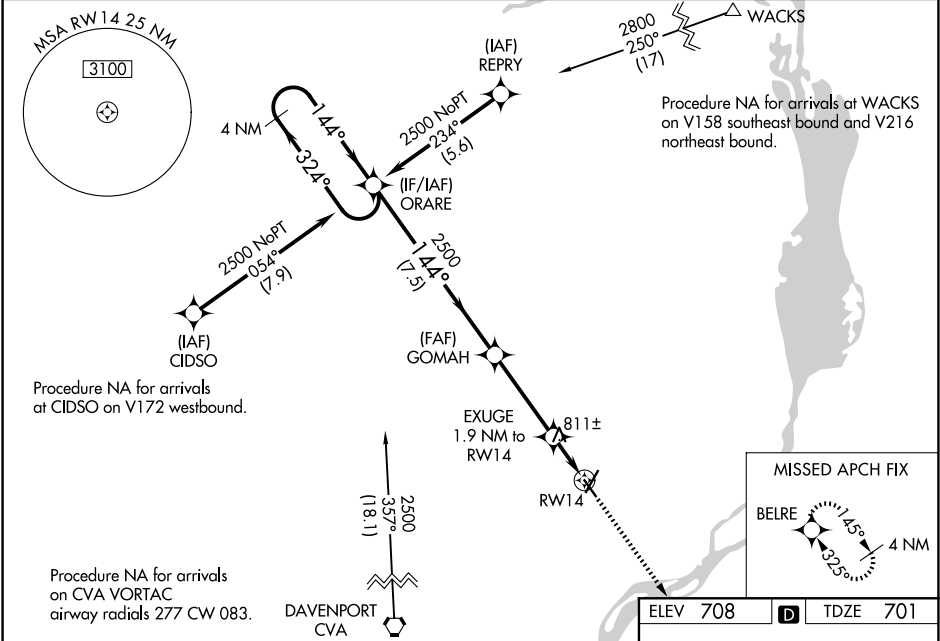

4 NM Holding Pattern		ORARE	GOMAH	2500 BELRE
2500 ← 324° 144° →		144°	2500	*LNAV only
GP 3.00° TCH 40		7.5 NM	3.6 NM	1.9 NM
		EXUGE 1.9 NM to RW14		*1340
CATEGORY	A	B	C	D
LPV DA	951-1 250 (300-1)		NA	
LNAV/VNAV DA	968-1 267 (300-1)		NA	
LNAV MDA	1080-1 379 (400-1)		NA	
CIRCLING	1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1½ 532 (600-1½)	NA

