

WAAS CH 69610 W03A	APP CRS 030°	Rwy Ldg TDZE Apt Elev	5204 700 708
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 3

CLINTON MUNI (CWI)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using DVN altimeter setting. When local altimeter setting not received, use DVN altimeter setting and increase LPV DA to 947 feet; increase LNAV/VNAV DA to 1086 feet and all visibilities ½ SM. Increase all MDAs 60 feet and LNAV visibility Cat C ½ SM.

MALSR

MISSED APPROACH: Climb to 2500 direct CUDMA and hold.

AWOS-3PT 125.525	QUAD CITY APP CON ★ 125.95 257.8	UNICOM 123.075 (CTAF) 1
----------------------------	--	-----------------------------------

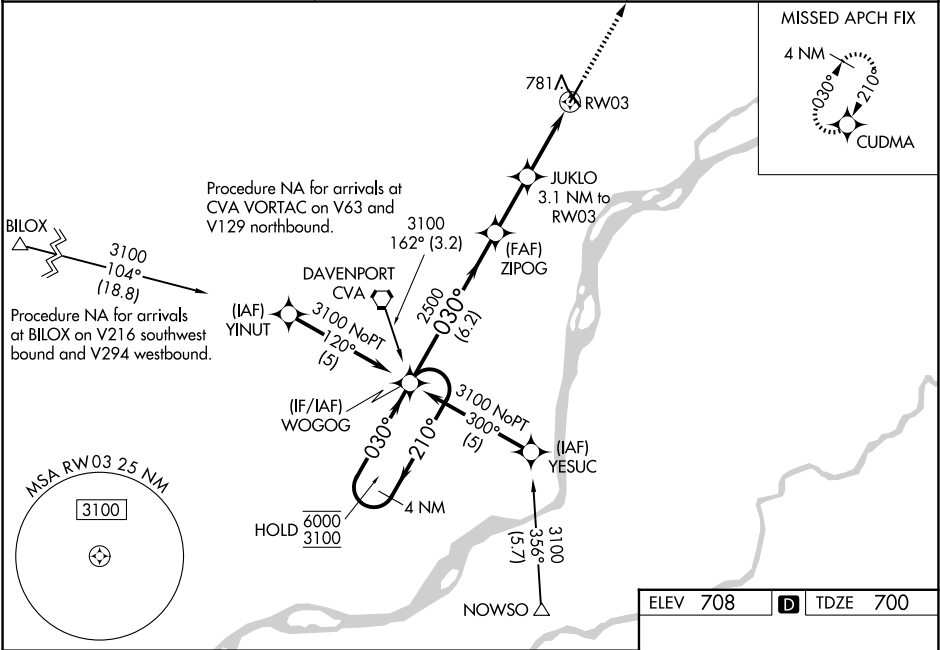

4 NM Holding Pattern WOGOG ZIPOG JUKLO 3.1 NM to RW03 0.9 NM to RW03 RW03 6000 ← 210° 3100 → 030° 030° 2500 2500 1740 GP 3.00° TCH 56 6.2 NM 2.3 NM 2.2 NM 0.9 NM 2500 CUDMA				
CATEGORY	A	B	C	D
LPV DA	900-½ 200 (200-½)			NA
LNAV/VNAV DA	1039-½ 339 (400-½)			NA
LNAV MDA	1040-½ 340 (400-½)			NA
CIRCLING	1140-1 432 (500-1)	1240-1 532 (600-1)	1240-1½ 532 (600-1½)	NA

