

APP CRS	Rwy Ldg	4158
065°	TDZE	151
	Apt Elev	151

RNAV (GPS) RWY 7

GAINESVILLE RGNL (GNTV)


▼

▲

DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Ocala Intl-Jim Taylor Fld altimeter setting. When local altimeter setting not received, use Ocala Intl-Jim Taylor Fld altimeter setting; increase all MDAs 100 feet and increase LNAV Cat C/D and Circling Cat C visibility ¼ SM and Circling Cat D ½ SM. When VGSI inoperative, Circling Rwy 25 NA at night.

MISSED APPROACH: Climb to 2000
direct IMCEF and hold.

ATIS 127.15	JACKSONVILLE APP CON 118.175 338.25	GAINESVILLE TOWER★ 119.55 (CTAF) 0 353.7	GND CON 121.7	UNICOM 122.95
----------------	--	---	------------------	------------------

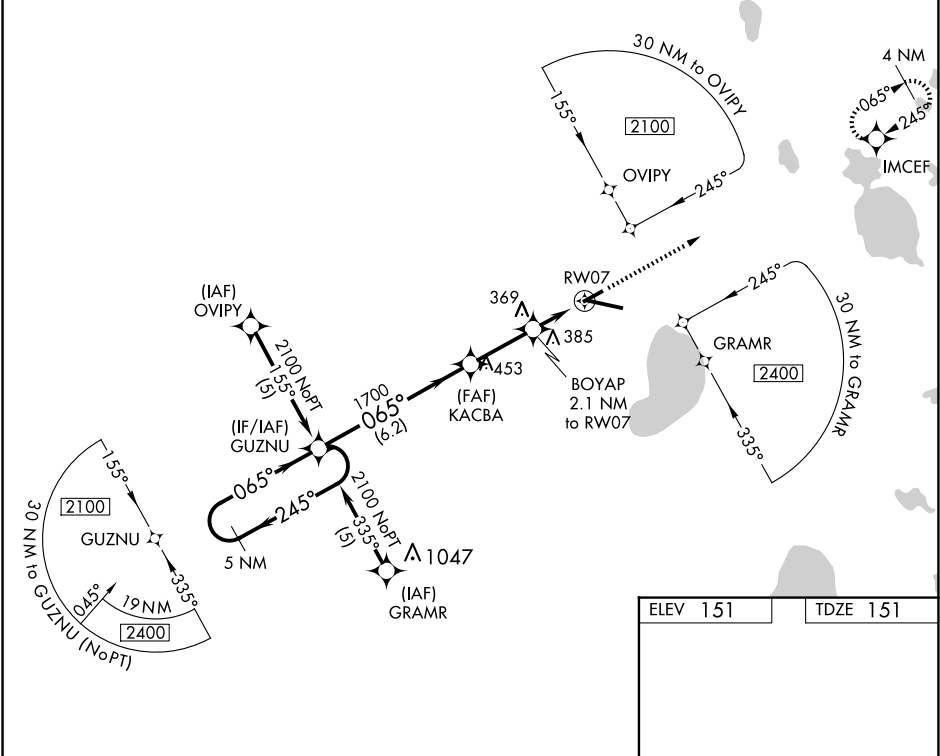

5 NM Holding Pattern		GUZNU		KACBA	BOYAP 2.1 NM to RW07	2000 ↑	IMCEF ✧
2100		←245°	065°→	065°	1700	1.3 NM to RW07	
				3.04' TCH 44	860	RW07	
		6.2 NM		2.6 NM		0.8	1.3 NM
CATEGORY	A	B	C	D			
LNAV MDA	620-1 469 (500-1)		620-1¼ 469 (500-1¼)		620-1½ 469 (500-1½)		
CIRCLING	620-1 469 (500-1)	700-1 549 (600-1)	760-1¾ 609 (700-1¾)		820-2 669 (700-2)		
REIL Rwy 11 MIRL Rwy 7-25 ① HIRL Rwy 11-29 ①							