


WAAS CH 78001 W32A	APP CRS 317°	Rwy Ldg 7120 TDZE 102 Apt Elev 107
---------------------------------	------------------------	---

RNAV (GPS) RWY 32
MC ALLEN INTL (MFE)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C (34°F) or above 54°C (130°F). Circling NA northeast of Rwy 14-32. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Weslaco altimeter setting: increase all DA 39 feet and LNAV/VNAV all Cat visibility ¼ mile; increase all MDA 40 feet and LNAV Cat C/D visibility ½ mile. Baro-VNAV and VDP NA when using Weslaco altimeter setting.

MISSED APPROACH: Climb to 800 then climbing right turn to 2000 direct SANCA and hold.

ATIS 128.5	VALLEY APP CON 126.55 377.2	MC ALLEN TOWER * 118.5 (CTAF) 0 256.9	GND CON 121.8	UNICOM 122.95
----------------------	---------------------------------------	---	-------------------------	-------------------------

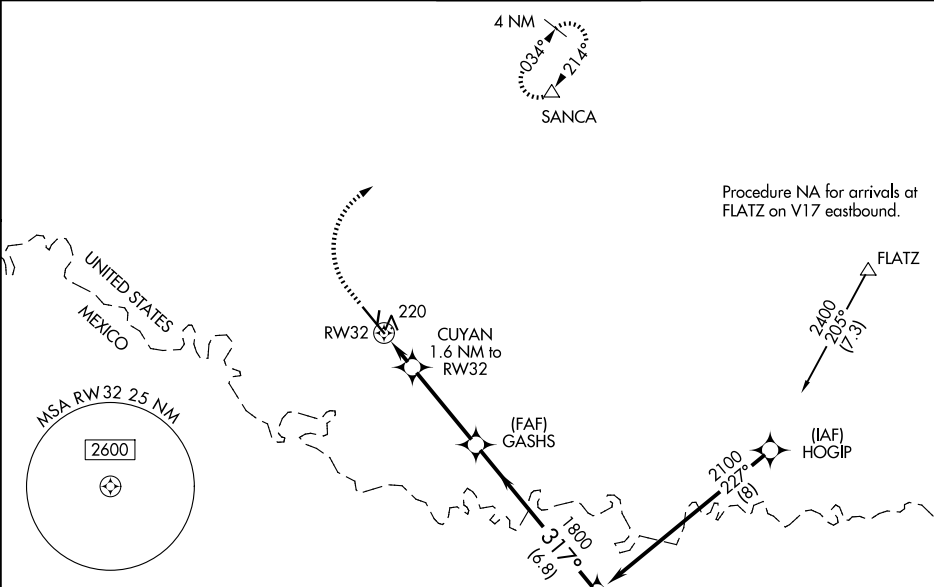

ELEV 107	D	TDZE 102
----------	----------	----------

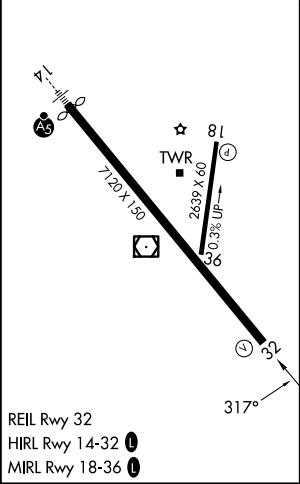

800	2000	SANCA	VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00/TCH 53).			
*LNAV only			FOVUD			
		GASHS	1800	317°	2100	
		CUYAN	1.6 NM to RW32			
		*1 NM to RW32				
		RW32				
		*660				
		1 NM	0.6	3.6 NM	6.8 NM	
CATEGORY	A	B	C	D		
LPV DA	302-¾		200 (200-¾)			
LNAV/VNAV DA	391-⅞		289 (300-⅞)			
LNAV MDA	480-1		378 (400-1)			
CIRCLING	580-1	473 (500-1)	580-1½ 473 (500-1½)	800-2¼ 693 (700-2¼)		

SC-3, 22 JAN 2026 to 19 FEB 2026

SC-3, 22 JAN 2026 to 19 FEB 2026