

WAAS CH 65929 W01B	APP CRS 016°	Rwy Ldg 7302 TDZE 1321 Apt Elev 1333
--	------------------------	---


RNAV (GPS) RWY 1R
WICHITA DWIGHT D EISENHOWER NTL (ICT)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). For inoperative MALS, increase LPV Cat E visibility to ¾, LNAV/VNAV Cat E visibility to 1½ and LNAV Cat C, D and E visibility to 1½. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Simultaneous approach authorized with ILS or LOC RWY 1L and ILS RWY 1L (CAT II). Use of FD or AP providing RNAV track guidance required during simultaneous operations. # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALS


MISSED APPROACH:
Climb to 3600 direct JAXSU and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
-----------------------	---------------------------------------	-------------------------------------	-------------------------------

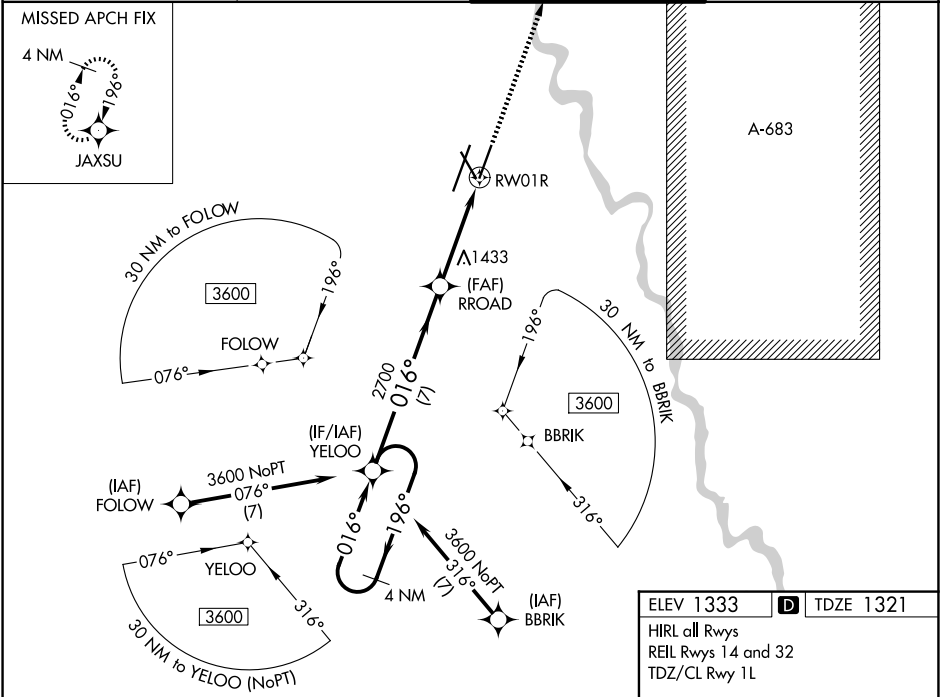

ELEV 1333	D TDZE 1321
HIRL all Rwys	
REIL Rwys 14 and 32	
TDZ/CL Rwy 1L	

4 NM Holding Pattern 3600 ←196° 016°→ GP 3.00° TCH 54					YELOO 016° 2700 7 NM					RROAD 2700 3.1 NM					*1.1 NM to RW01R RW01R 1.1					3600 JAXSU *LNAV only.				
CATEGORY		A		B		C		D		E														
LPV DA#		1521/24 200 (200-½)																						
LNAV/VNAV DA		1660/32 339 (400-¾)																						
LNAV MDA		1740/24 419 (500-½)				1740/40 419 (500-¾)																		
CIRCLING		1800-1 467 (500-1)				1980-1¾ 647 (700-1¾)				1980-2 647 (700-2)				2000-2¼ 667 (700-2¼)										

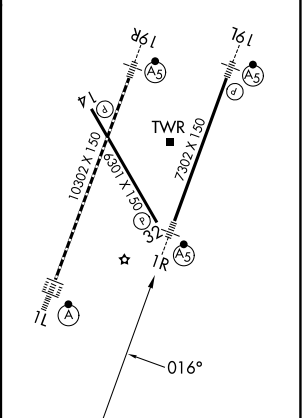

NC-2, 22 JAN 2026 to 19 FEB 2026

NC-2, 22 JAN 2026 to 19 FEB 2026