

APP CRS	Rwy Ldg	10302
016°	TDZE	1314
	Apt Elev	1333

RNAV (RNP) Z RWY 1L

WICHITA DWIGHT D EISENHOWER NTL (ICT)


RNP AR APCH

Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 5500.

ALSF-2

MISSED APPROACH:
Climb to 4200 on track 016° to ACUBO and hold.

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
----------------	--------------------------------	------------------------------	------------------------

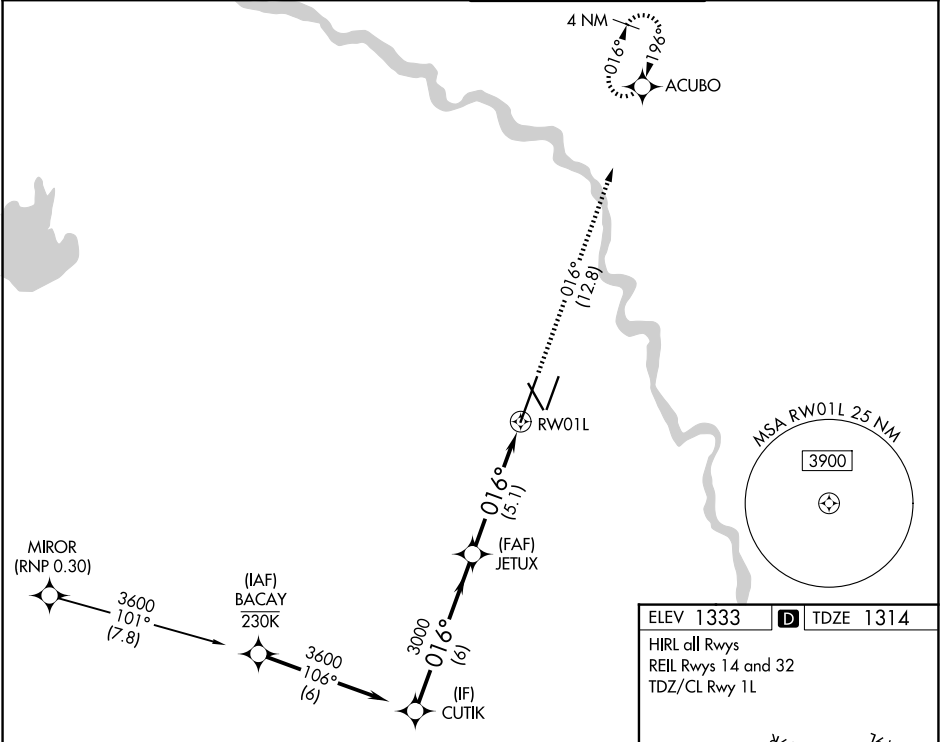

CUTIK	JETUX	4200	ACUBO
3600	3000	fr 016°	
GP 3.00° TCH 52	3000	RW01L	
	6 NM	5.1 NM	
CATEGORY	A	B	C
RNP 0.15 DA	1626/28	312 (300-5%)	
RNP 0.30 DA	1676/35	362 (400-5%)	
AUTHORIZATION REQUIRED			

NC-2, 22 JAN 2026 to 19 FEB 2026

NC-2, 22 JAN 2026 to 19 FEB 2026