
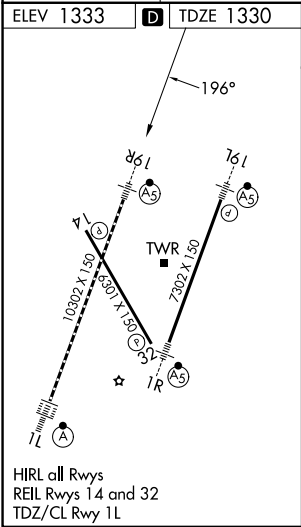


WAAS CH 63019 W19A	APP CRS 196°	Rwy Ldg 10302 TDZE 1330 Apt Elev 1333
--	------------------------	--

RNAV (GPS) Y RWY 19R
WICHITA DWIGHT D EISENHOWER NTL (ICT)

 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat C/D visibility to RVR 6000. # RVR 1800 authorized with use of FD or AP or HUD to DA.	 MALSR	MISSED APPROACH: Climb to 3600 direct CUTIK and hold.
---	-----------	---

ATIS 125.15	WICHITA APP CON 126.7 353.5	WICHITA TOWER 118.2 257.8	GND CON 121.9 348.6
-----------------------	---------------------------------------	-------------------------------------	-------------------------------

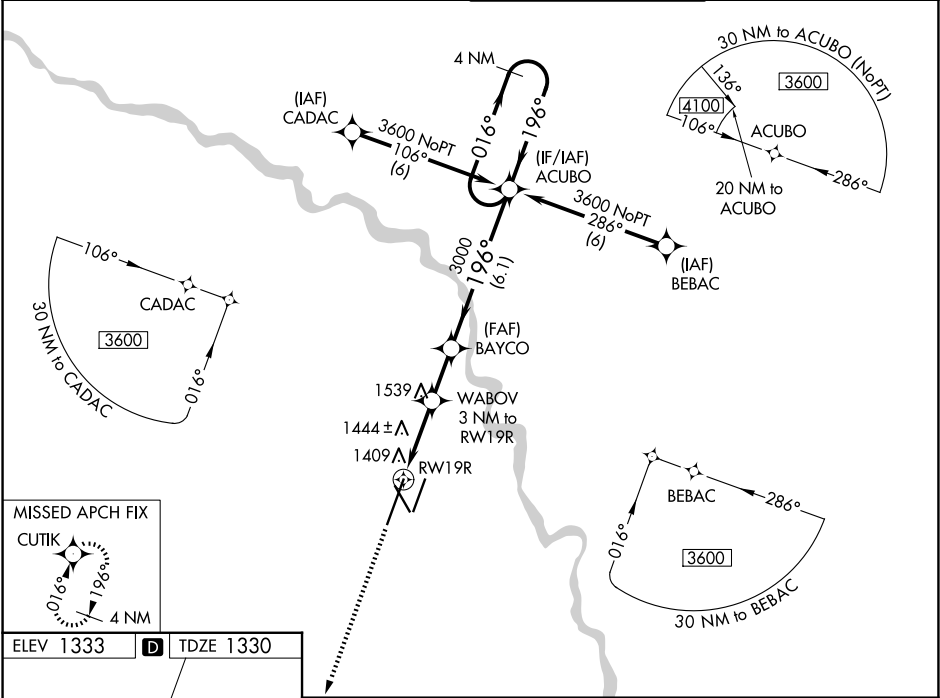

3600 CUTIK		ACUBO 4 NM Holding Pattern	
*LNAV only.		BAYCO 3000	
1.1 NM to RW19R		2340	
1.1 NM		6.1 NM	
CATEGORY	A	B	C
LPV DA #	1530/24 200 (200-½)		
LNAV/VNAV DA	1742/45 412 (500-¾)		
LNAV MDA	1740/24 410 (500-½)	1740/40 410 (500-¾)	
CIRCLING	1800-1 467 (500-1)	1980-1¾ 647 (700-1¾)	1980-2 647 (700-2)

NC-2, 22 JAN 2026 to 19 FEB 2026

NC-2, 22 JAN 2026 to 19 FEB 2026