


WAAS CH 65646 W06A	APP CRS 059°	Rwy Ldg 5100 TDZE 1720 Apt Elev 1720
--	------------------------	---

RNAV (GPS) RWY 6

RNP APCH - GPS.		MISSED APPROACH: Climb to 2200 then climbing left turn to 4800 direct CIMGO and hold.
 Rwy 6 helicopter visibility reduction below 3/4 SM NA.  -48°C For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C.		

ASOS 135.4	ANCHORAGE CENTER 126.55 323.0	NORTHWAY RADIO 123.6 (CTAF) 0
----------------------	---	--

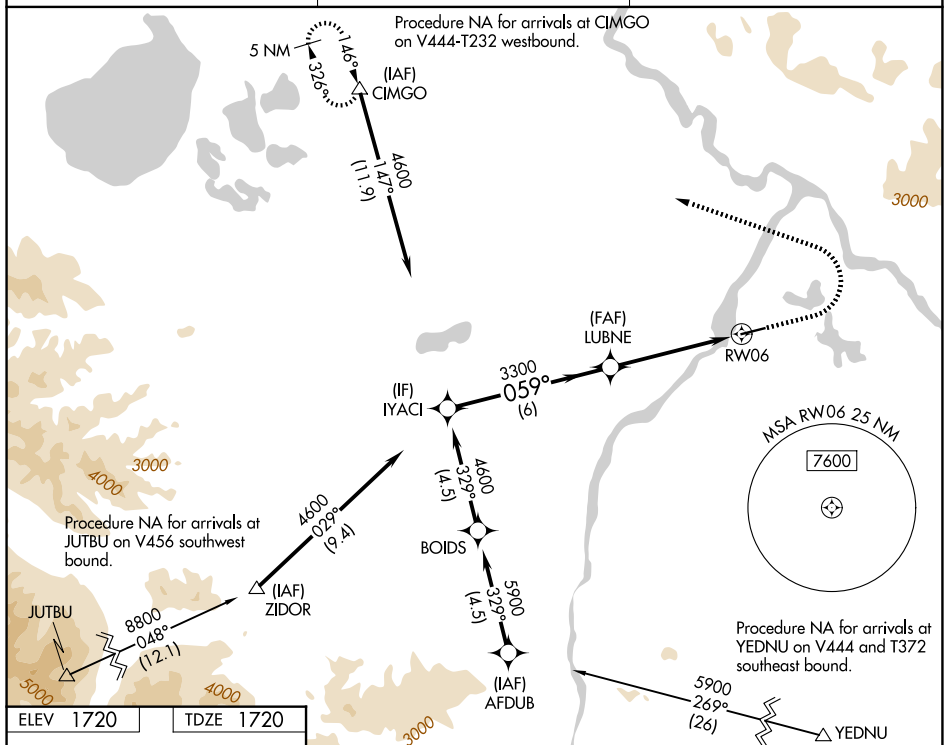

ELEV 1720		TDZE 1720
-----------	--	-----------

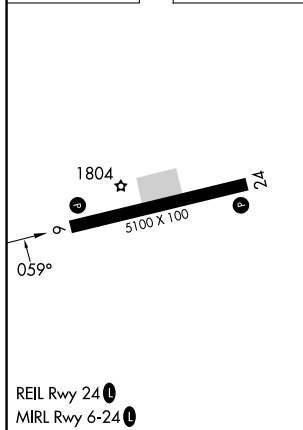


Diagram illustrating a flight profile for a 300° heading. The profile starts at 4600 feet, descends at 0.59° to 3300 feet, then descends at 1.3 NM to RW06. The profile is divided into four segments: A (6 NM), B (3.5 NM), C (1.3 NM), and D. The diagram also shows a 300° heading, a 39° climb gradient, and a 300° heading. The diagram includes a legend for symbols: a vertical arrow for 2200, a curved arrow for 4800, and a triangle for C/MGO.