
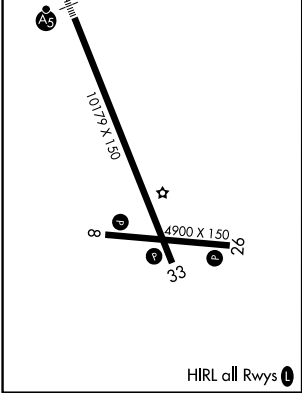


WAAS CH 45612 W15A	APP CRS 146°	Rwy Ldg TDZE Apt Elev	10179 75 100
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15
COLD BAY (CDB) (PACD)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Circling NA for Cat A southwest of Rwy 15-33 at night. Circling NA for Cats B/C/D southwest of Rwy 15-33. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4000 and LNAV Cat C/D visibility to RVR 6000. #RVR 1800 authorized with use of FD or AP or HUD to DA.	MALSR 	MISSED APPROACH: Climb to 4100 direct PABGE and on track 134° to AFVEK and hold, continue climb-in-hold to 4100.
--	-----------	--

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 0
-----------------------	--	---

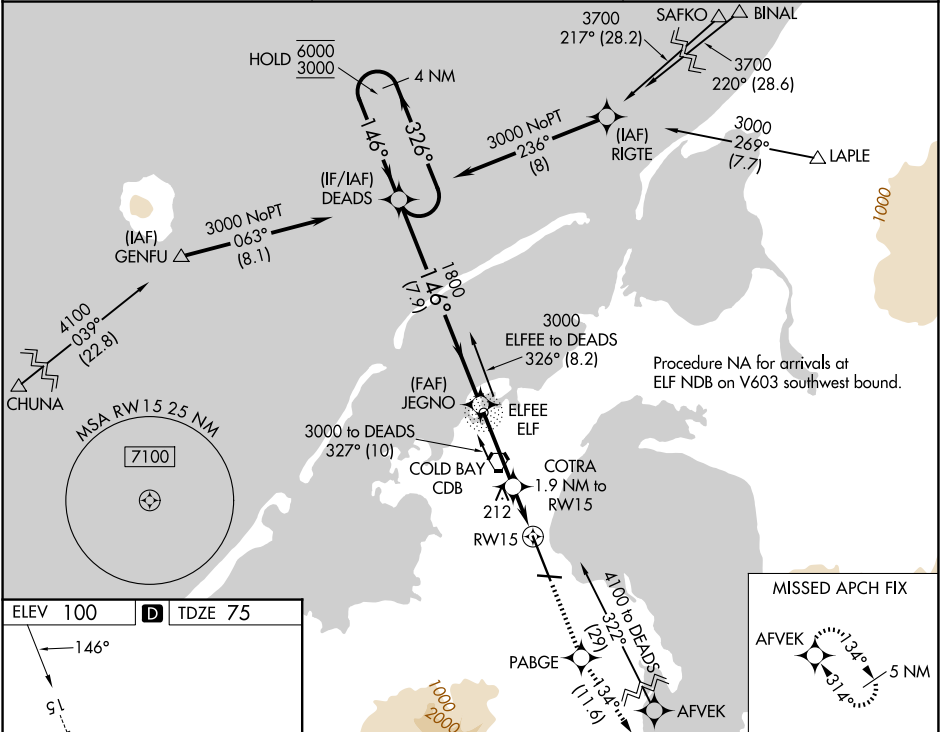

4 NM Holding Pattern		DEADS	JEGNO	4100	PABGE	tr 134°	AFVEK
6000 ← 326°		1800	1800	↑	✱	✱	✱
3000 → 146°		146°	146°	COTRA 1.9 NM to RW15	✱	✱	✱
GP 3.10° TCH 55		7.9 NM	3.2 NM	0.8 NM	1.1 NM		
CATEGORY		A	B	C	D		
LPV DA#		275/24		200 (200-½)			
LNAV/VNAV DA		325/24		250 (300-½)			
LNAV MDA		480/24		405 (400-½)			
CIRCLING		540-1		560-1			
		440 (500-1)		460 (500-1)			
		560-1		560-1½			
		440 (500-1½)		460 (500-1½)			
		860-2½		760 (800-2½)			