

WAAS CH 81815 W07A	APP CRS 074°	Rwy Ldg 12400 TDZE 132 Apt Elev 151
--	------------------------	--

RNAV (GPS) Y RWY 7R
TED STEVENS ANCHORAGE INTL (ANC) (PANC)

RNP APCH

 For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C/D visibility to 1 3/8 SM.

ALSF-2



MISSED APPROACH: Climb to 900 then climbing right turn to 3000 direct JUKEP and hold.



D-ATIS
135.5

ANCHORAGE APP CON
118.6 290.5

ANCHORAGE TOWER
118.3 257.8

GND CON
121.9 338.25

CLNC DEL
119.4 323.1

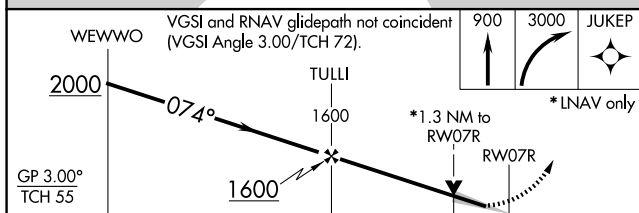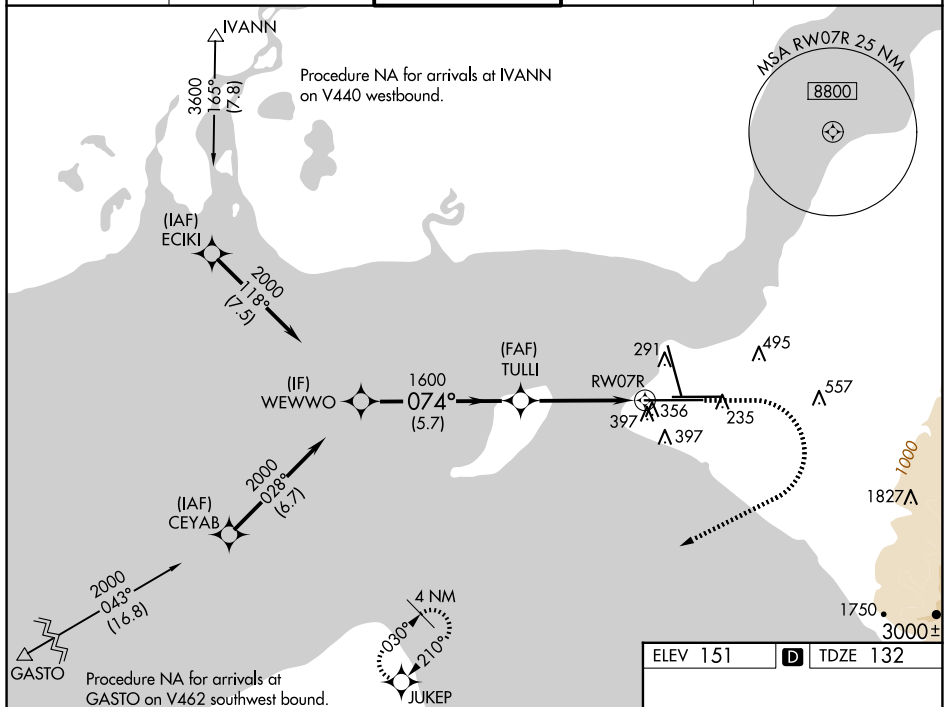

		5.7 NM		3.1 NM		1.3 NM	
CATEGORY		A		B		C	
LPV	DA	332/18 200 (200-½)					
LNAV/ VNAV	DA	648/55 516 (500-1)					
LNAV	MDA	620/24 488 (500-½)				620/50 488 (500-1)	
C CIRCLING		700-1 549 (600-1)		800-1¾ 649 (700-1¾)		920-2½ 769 (800-2½)	

