

APP CRS
063°

Rwy Ldg
TDZE **256**
Apt Elev **305**


RNAV (RNP) Z RWY 6L
GUAM INTL (GUM)(PGUM)

RNP AR APCH - GPS.
▼ For uncompensated Baro-VNAV systems, procedure NA below 19°C or above 48°C. For inop ALS, increase RNP 0.30* visibility to ¾ SM and RNP 0.30 visibility to 1½ SM.

MALSR


MISSED APPROACH: Climb to 3000 on 063° track to WABOX and hold.
*Missed approach requires minimum climb of 276 feet per NM to 1400.

ATIS 119.0	GUAM CERAP 119.8 269.0	AGANA TOWER 118.1 340.2	GND CON 121.9 336.4
----------------------	----------------------------------	-----------------------------------	-------------------------------

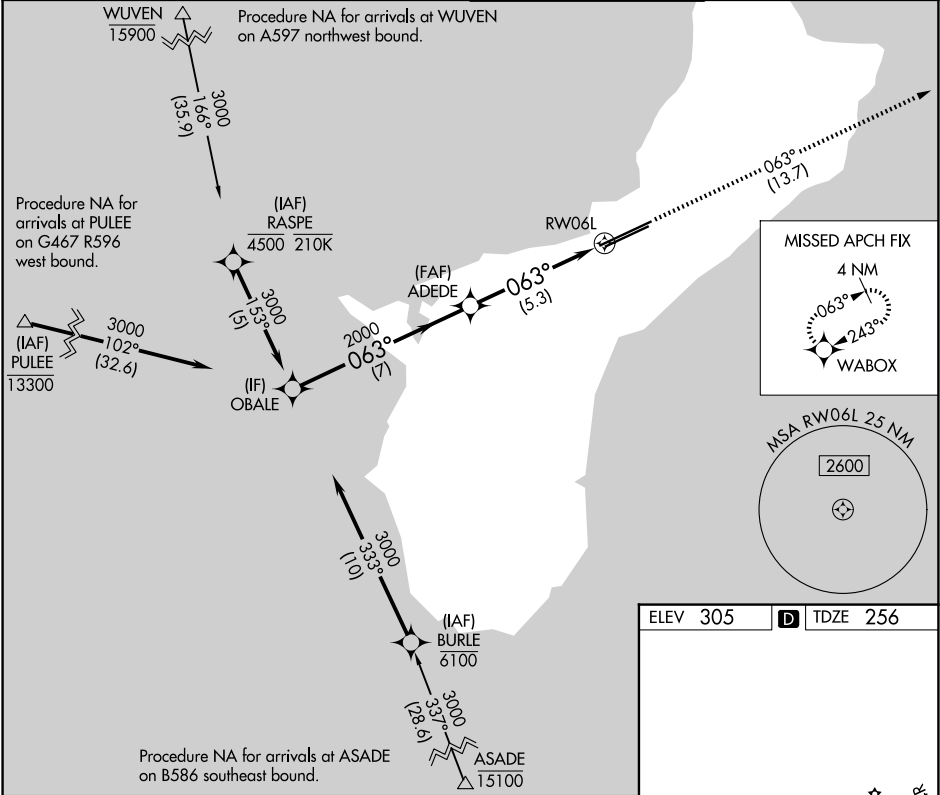

OBALE VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 73)

3000
063°
ADEDE
2000
GP 3.00° TCH 55
7 NM
5.3 NM
WABOX
063° tr
3000
2000

GP 3.00° TCH 55

WABOX
063°
0.5% UP
0.7% DOWN
1201.4 X 150
1001.4 X 150
0.8% UP
0.6% DOWN
TWR
241.8

CATEGORY	A	B	C	D
RNP 0.30 DA*		514-½	258 (300-½)	
RNP 0.30 DA		656-⅝	400 (400-⅝)	

AUTHORIZATION REQUIRED

HIRL all Rwys