

RNAV (GPS) RWY 35

APCH CRS	Rwy Idg	8001
346°	TDZE	307
	Arpt Elev	322

[USN]

GOLIAD NOLF (KNGT)


RNP APCH

When local altimeter setting not received, use Beeville Muni altimeter setting.

MISSED APPROACH: Climb to 900 then climbing right turn to 4000 direct SWEEN and hold, continue climb-in-hold to 4000.


ASOS
353.675

CTAF
132.875 307.075

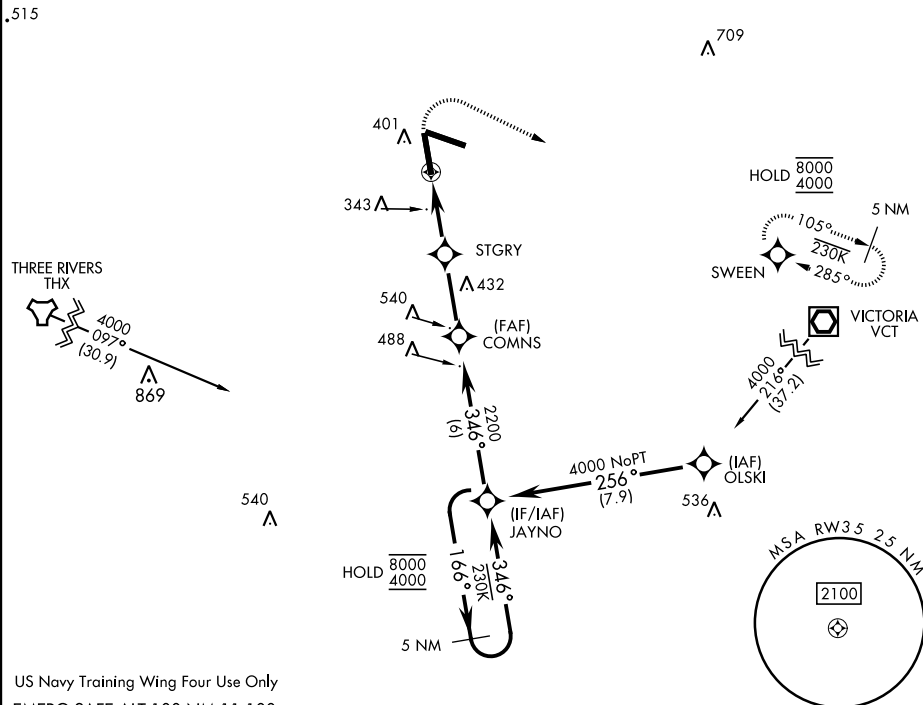

US Navy Training Wing Four Use Only

EMERG SAFE ALT 100 NM 11,100

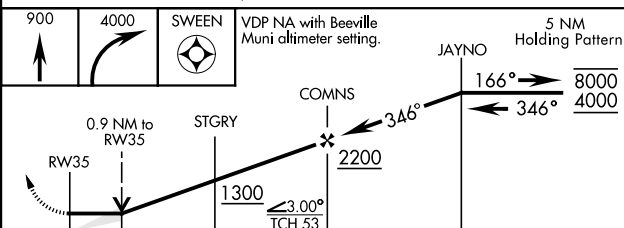

	3 NM	2.8 NM		
CATEGORY	A	B	C	D
RNAV MDA	620-1 313 (300-1)			
CIRCLING	760-1 438 (500-1)	780-1 458 (500-1)	780-1½ 458 (500-1½)	880-2 558 (600-2)
BEEVILLE MUNI ALTIMETER SETTING MINIMA				
RNAV MDA	660-1 353 (400-1)			
CIRCLING	800-1 478 (500-1)	820-1 498 (500-1)	820-1½ 498 (500-1½)	880-2 558 (600-2)

