

WAAS CH 61103 W27A	APP CRS 270°	Rwy Idg TDZE 92 Apt Elev 112
--	------------------------	--

RNAV (GPS) RWY 27

ESLER RGNL (E/SF')


RNP APCH-GPS.

⚠ Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting: increase LPV DA to 327 feet; increase LNAV/VNAV DA to 457 feet and all visibility ½ SM; increase all MDAs 40 feet and LNAV visibility Cat C/D ⅓ SM and Circling visibility Cat D ¼ SM. For inop MALSR increase LNAV/VNAV all Cats visibility to 1 mile and LNAV Cat C/D visibility to 1½. For inop MALSR, when using Alexandria Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 3000 direct HOVUS and on track 214° to AEX VORTAC and hold.

ESF ASOS 119.425	POLK APP CON 125.4 254.8	UNICOM 122.8 (CTAF) 0
----------------------------	------------------------------------	---------------------------------

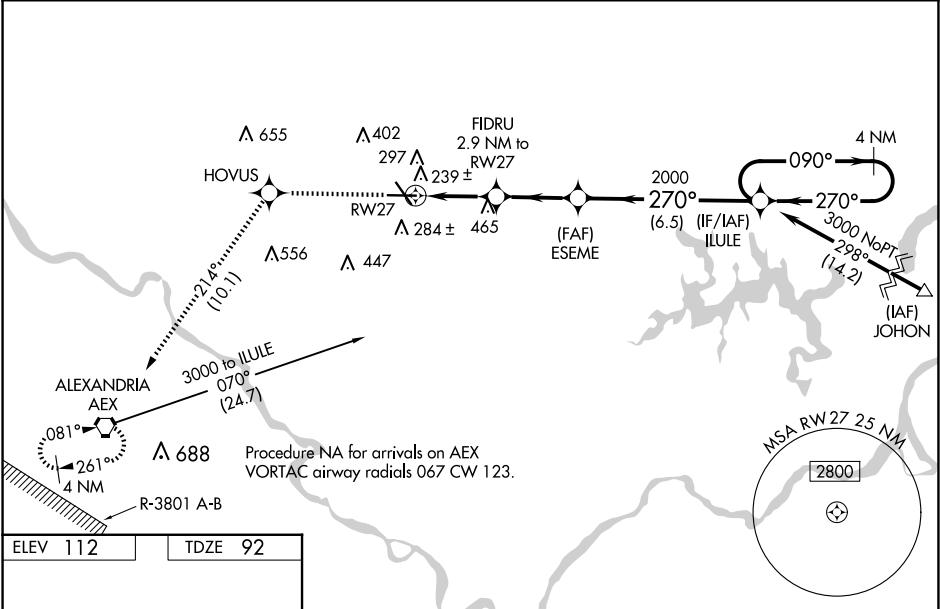

ELEV 112

TDZE 92

REIL Rws 9, 14 and 32 0

MIRL Rwy 14-32 0

HIRL Rwy 9-27 0

3000	HOVUS	tr 214°	AEX	ILULE	4 NM Holding Pattern
*LNAV only.			FIDRU 2.9 NM to RW27	ESEME 2000	
			*1.1 NM to RW27		
				1060*	
				2000	
				270°	
				090°	
				3000	
				GP 3.00°	
				TCH 59	
				1.1 NM	
				1.8 NM	
				2.9 NM	
				6.5 NM	
CATEGORY	A	B	C	D	
LPV DA		292-½	200 (200-½)		
LNAV/VNAV DA		422-½	330 (400-½)		
LNAV MDA	500-½	408 (400-½)	500-¾	408 (400-¾)	
CIRCLING	600-1	488 (500-1)	740-1¾	760-2	
			628 (700-1¾)	648 (700-2)	