

WAAS CH 60914 W31A	APP CRS 312°	Rwy Ldg 7510 TDZE 43 Apt Elev 46
--	------------------------	---

RNAV (GPS) Y RWY 31
CORPUS CHRISTI INTL (CRP)


RNP APCH - GPS.

A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1°C or above 54°C.
Procedure NA when Cabanis Fld traffic patterns active. For inop ALS, increase LPV Cat E visibility to $\frac{3}{4}$ SM, LNAV/VNAV all Cats visibility to $\frac{7}{8}$ SM, and LNAV Cat E visibility to $1\frac{3}{8}$ SM.

MALSR

MISSED APPROACH:
Climb to 2000 direct
ATHIS and hold.

ATIS 126.8	CORPUS APP CON 120.9 348.725	CORPUS TOWER 119.4 257.8	GND CON 121.9 269.15	CLNC DEL 118.55
---------------	---------------------------------	-----------------------------	-------------------------	--------------------

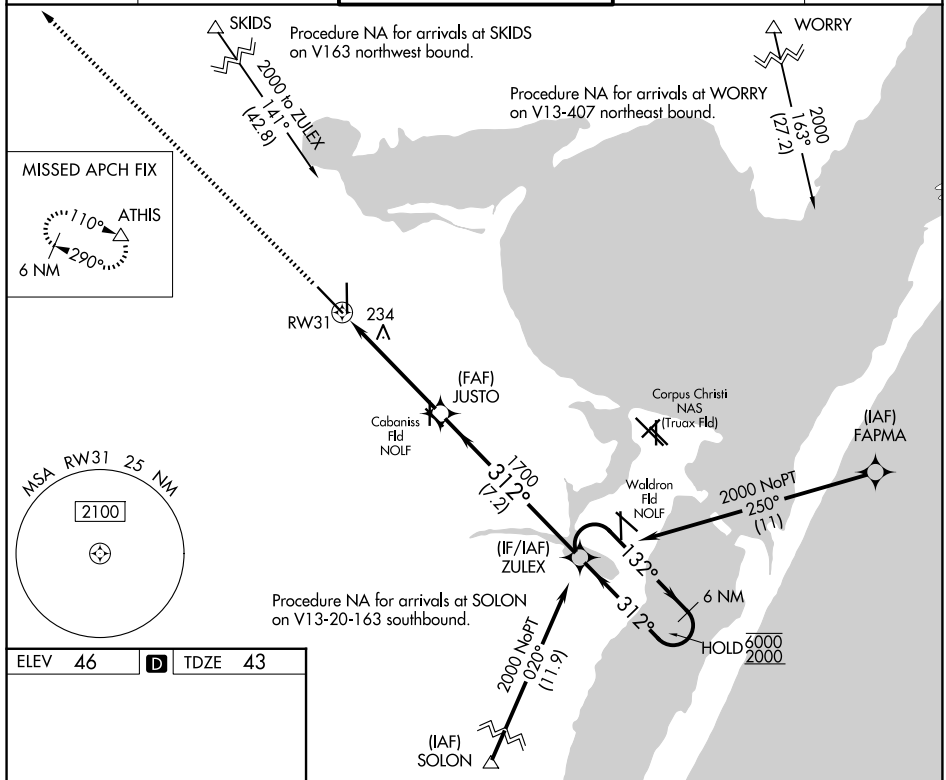

CATEGORY	A	B	C	D	E
LPV DA	243-1/2	200 (200-1/2)			
LNAV/VNAV DA	356-5/8	313 (400-5/8)			
LNAV MDA	500-1/2	457 (500-1/2)	500-7/8	457 (500-7/8)	
CIRCLING	500-1 454 (500-1)	780-1 734 (800-1)	820-2 1/4 774 (800-2 1/4)	820-2 1/2 774 (800-2 1/2)	820-2 3/4 774 (800-2 3/4)

CORPUS CHRISTI TEXAS

Amdt 4A 02NOV23

27°46'N-97°30'W

CORPUS CHRISTI INTL (CRP)

RNAV (GPS) Y RWY 31