

WAAS CH 99341 W21A	APP CRS 214°	Rwy Ldg 7000 TDZE 7003 Apt Elev 7014
--	------------------------	---



RNAV (GPS) RWY 21

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19 °C (2°F) or above 44°C (111°F). DME/DME RNP-0.3 NA.
A For inop ALS, increase LPV all Cats visibility to 7/8 SM.

MALSR

MISSED APPROACH: Climb to 7500 then climbing left turn to 10800 direct HOXOL and hold.

ATIS 125.8	PHOENIX APP CON 126.375 236.775	FLAGSTAFF TOWER ★ 134.55 (CTAF) 0 239.25	GND CON 121.9	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

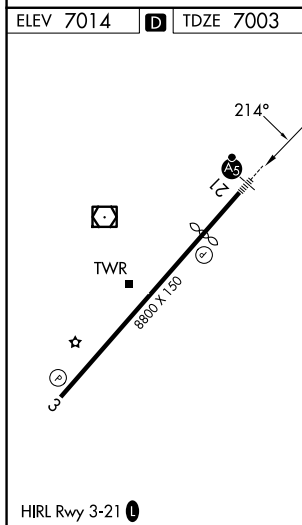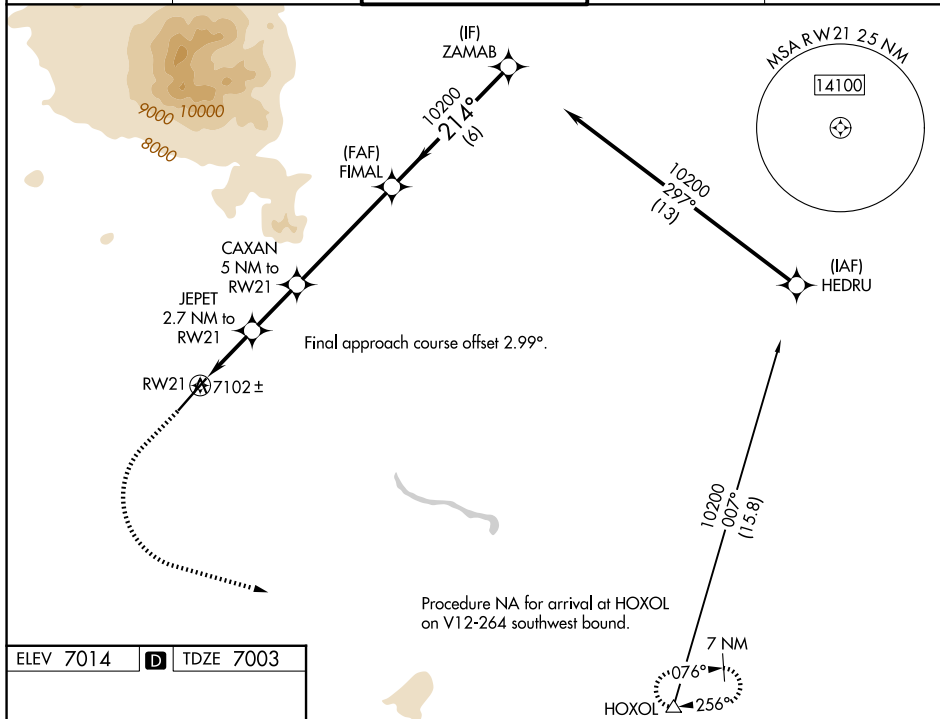

7500 ↑	10800 ↖	HOXOL △				
*LNAV only			10200 214° 10200 GP 3.00° TCH 52			
CATEGORY	A		B		C	D
LPV DA	7258-½		255 (300-½)			
LNAV/ VNAV DA	7319-⅝		316 (400-⅝)			
LNAV MDA	7360-½	357 (400-½)	7360-⅝		357 (400-⅝)	
CIRCLING	7520-1 506 (600-1)	7560-1 546 (600-1)	8100-3 1086 (1100-3)		8560-3 1546 (1600-3)	