

VOR RWY 35  
ACADIANA RGNL (ARA)




Circling NA to Rwy 17W and 35W.  
DME required.  
Inop table does not apply.




**MISSED APPROACH:** Climbing right turn to 2000 on heading 080° and LFT R-114 to CLYNT INT/LFT 18.8 DME and hold.

|                 |                                   |                                         |                  |                  |
|-----------------|-----------------------------------|-----------------------------------------|------------------|------------------|
| ASOS<br>133.325 | LAFAYETTE APP CON★<br>121.1 268.7 | ACADIANA TOWER★<br>125.0 (CTAF) 0 239.3 | GND CON<br>121.7 | UNICOM<br>122.95 |
|-----------------|-----------------------------------|-----------------------------------------|------------------|------------------|

## DME REQUIRED

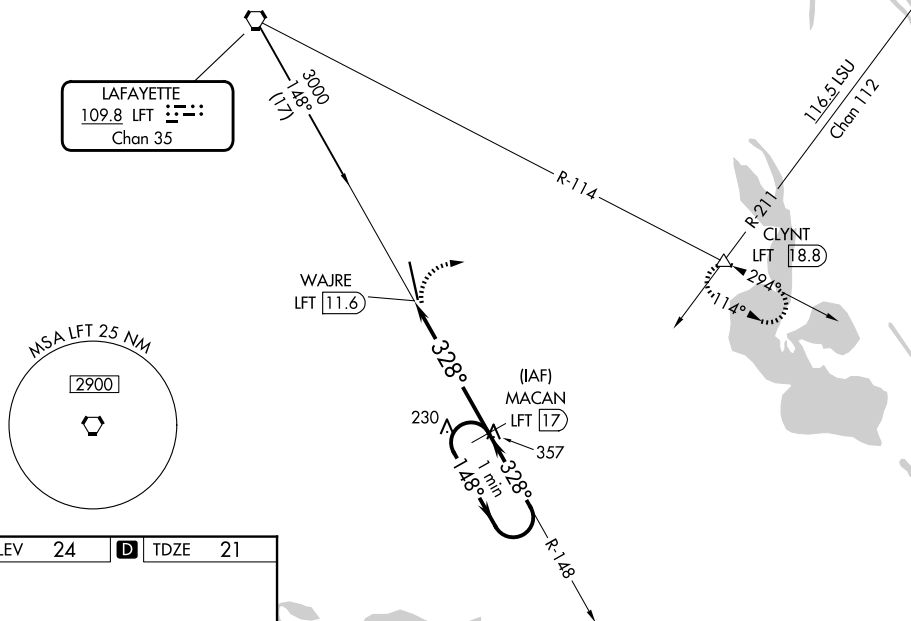

|      |    |          |      |    |
|------|----|----------|------|----|
| ELEV | 24 | <b>D</b> | TDZE | 21 |
|------|----|----------|------|----|

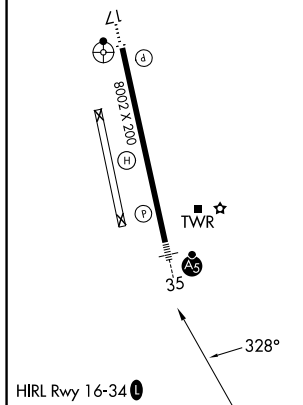

|                     |              |             |                                                                                                                                                                 |                      |                      |  |  |
|---------------------|--------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|--|--|
| 2000<br>hdg<br>080° | LFT<br>R-114 | CLYNT<br>△  | <p>MACAN<br/>LFT 17</p> <p>One Minute<br/>Holding Pattern</p> <p>WJRE<br/>LFT 11.6</p> <p>3.00°<br/>TCH 52</p> <p>148° → 1800</p> <p>← 328°</p> <p>1.5 4 NM</p> |                      |                      |  |  |
| CATEGORY            | A            | B           | C                                                                                                                                                               | D                    | E                    |  |  |
| S-35                | 540-½        | 519 (600-½) | 540-1⅜ 519 (600-1⅜)                                                                                                                                             |                      |                      |  |  |
| CIRCLING            | 540-1        | 516 (600-1) | 600-1½<br>576 (600-1½)                                                                                                                                          | 680-2<br>656 (700-2) | 900-3<br>876 (900-3) |  |  |