



TOP ALTITUDE: ASSIGNED BY ATC	RNAV 1 - DME/DME/IRU or GPS. RADAR required.	DETROIT DEP CON 132.35 284.0 ATIS 125.025 CLNC DEL 118.25 GND CON 121.9 PONTIAC TOWER * 120.5 (CTAF)
--	---	---

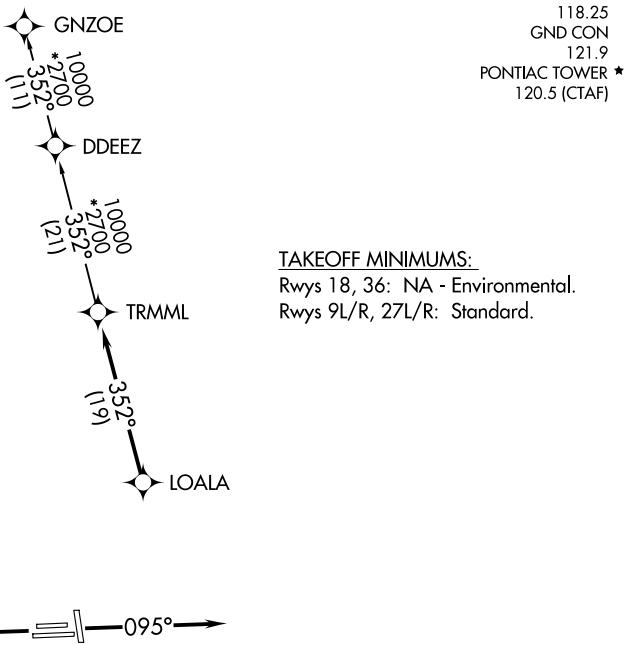

TAKEOFF MINIMUMS:
Rwys 18, 36: NA - Environmental.
Rwys 9L/R, 27L/R: Standard.

NOTE: Turbojet departures at/above 10000,
maintain 280K until advised by ATC.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

TAKEOF RUNWAYS 9L/R: Climb on heading 095° or as assigned by ATC,
thence....

TAKEOF RUNWAYS 27L/R: Climb on heading 275° or as assigned by ATC,
thence....

....for RADAR vectors to LOALA, then on track 352° to TRMML, then on (transition).
Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

GNZOE TRANSITION (TRMML4.GNZOE):