

LOC/DME I-LHJ

111.55

APP CRS

201°

Rwy Ldg

8000

TDZE

871

Chan

52(Y)

Apt Elev

871

ILS or LOC RWY 20

CENTRAL IL RGNL/BLOOMINGTON-NORMAL (BMI)

ADF or DME or RADAR required for LOC only.
RADAR required for procedure entry at OLIDE.

⚠

VDP NA when using PIA altimeter setting. When local altimeter setting not received, use PIA altimeter setting: increase S-ILS 20 DA to 1187 feet and all visibilities to RVR 2400; increase all MDAs 120 feet and S-LOC 20 visibility Cats C and D to RVR 5500 and Circling visibility Cats C and D ¼ SM. For inop ALS when using PIA altimeter setting, increase S-ILS 20 all Cats visibility to RVR 4500 and S-LOC 20 Cats C and D visibility to 1¾ SM.

ALSF-2

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 on heading 279° and SPI VORTAC R-037 to MCLEN INT/PIA 34.2 DME and hold, continue climb-in-hold to 3000.

ATIS

119.575

SAINT LOUIS APP CON

128.725 256.9

BLOOMINGTON TOWER ★


124.6 (CTAF) 269.575

GND CON

121.65

UNICOM

122.95

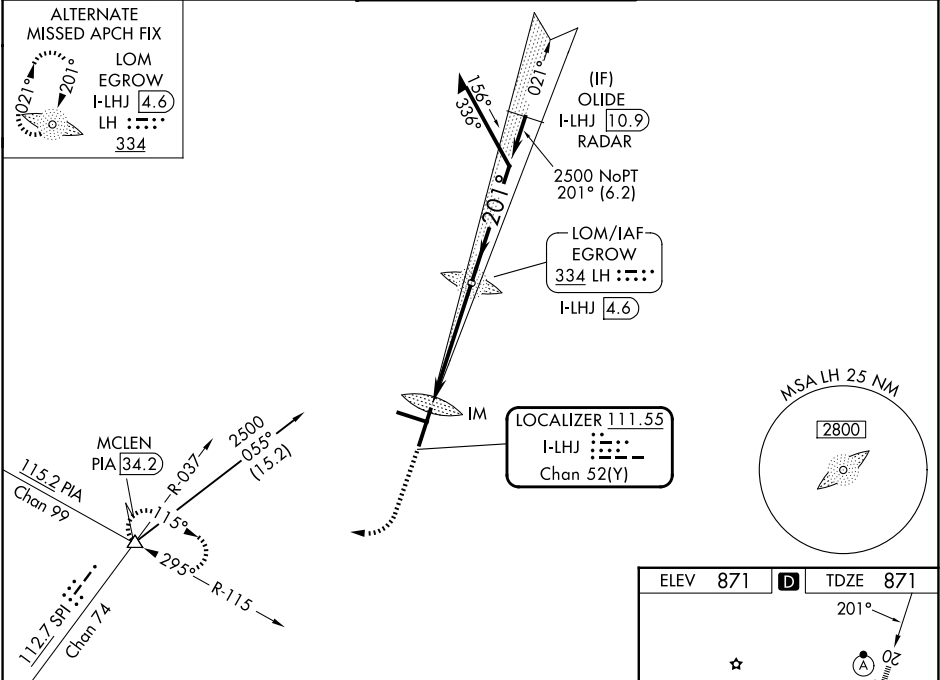

1500	3000	SPI R-037	MCLEN	LH LOM EGROW I-LHJ 4.6	Remain within 10 NM
		hdg 279°	△		
IM	I-LHJ 0.2	I-LHJ 0.9	2437	021°	2500
				201°	2500
					GS 3.00° TCH 58
	0.2	0.8	3.7 NM		
CATEGORY	A	B	C	D	
S-ILS 20	1071/18		200 (200-½)		
S-LOC 20	1260/24	389 (400-½)	1260/35	389 (400-¾)	
CIRCLING	1340-1	469 (500-1)	1620-2¼ 749 (800-2¼)	1620-2½ 749 (800-2½)	

ELEV 871

TDZE 871

TDZ/CL Rwy 20

HIRL Rwy 2-20 and 11-29

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36